




This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

All technical specifications, EASE-simulation-data and the DoP (Declaration of Performance) can be downloaded in the EN54 product section of our website www.ic-audio.com

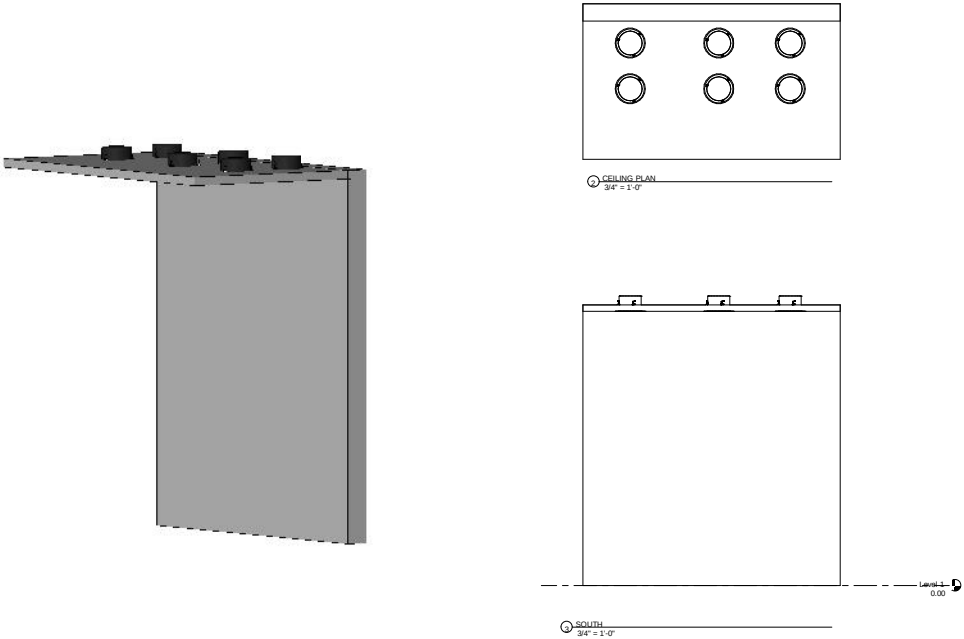

Ceiling Speaker Schedule-ic audio								
count	Manufacturer	Description	Model	Electrical Data	In rating	Weight	Part number	Frequency Range
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-12 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-6 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-3 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-12 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-6 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)
1	ic audio GmbH Germany	AB-line Ceiling speaker with metal freestone for Voice Alarm EN54	DL-AB 06-200/T-EN54	120 V/1-3 VA	IP21	2,20 kg	20102182	162 - 18.600 Hz (single), 159 - 16.000 Hz (double)