




This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the
Construction Products Regulation EU N°
305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

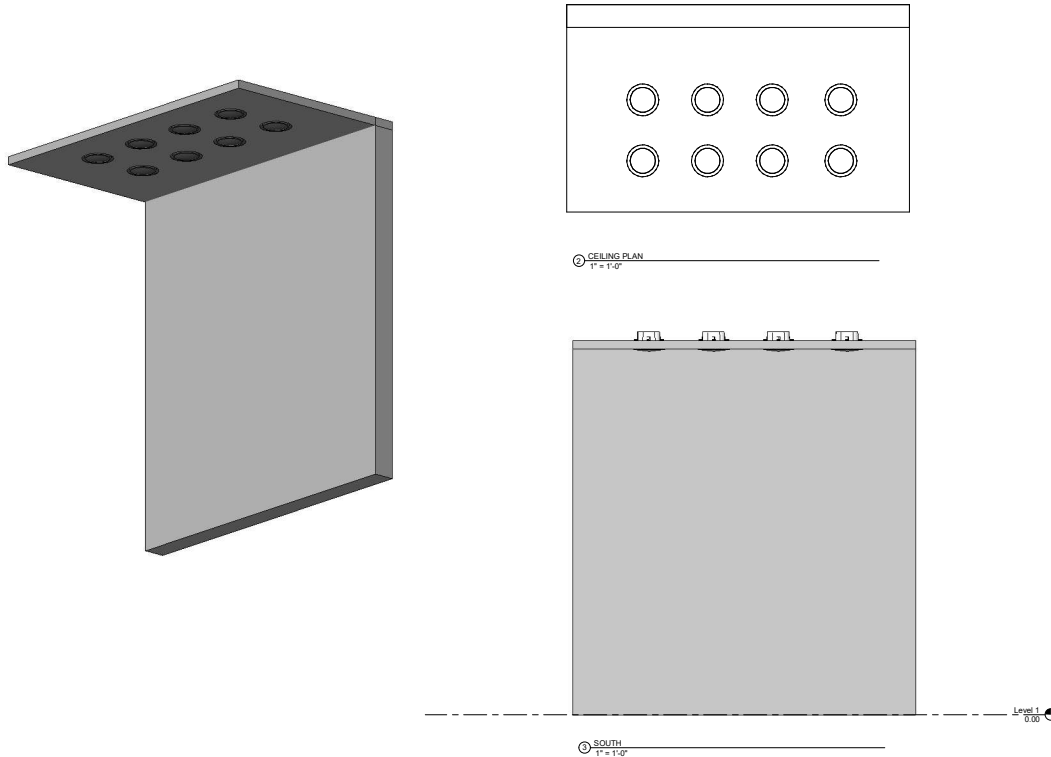

Speaker Schedule/C Audio								
Coat	Manufacturer	Description	Model	In rating	Weight	Part number	Frequency Range	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	
ic audio GmbH Germany		2-Way-Ceiling speaker with freedom for Voice Alarm EN54	DL-BR 15-100T plate-EN54	P21	1.73 kg	20-42681	100 - 22,800 Hz	