
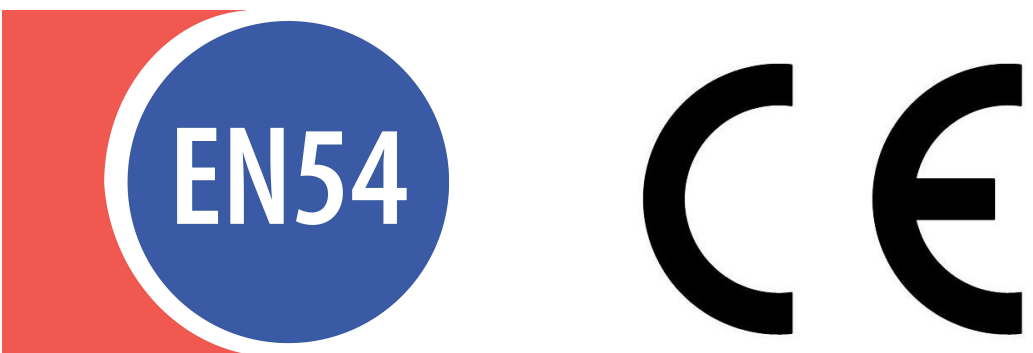

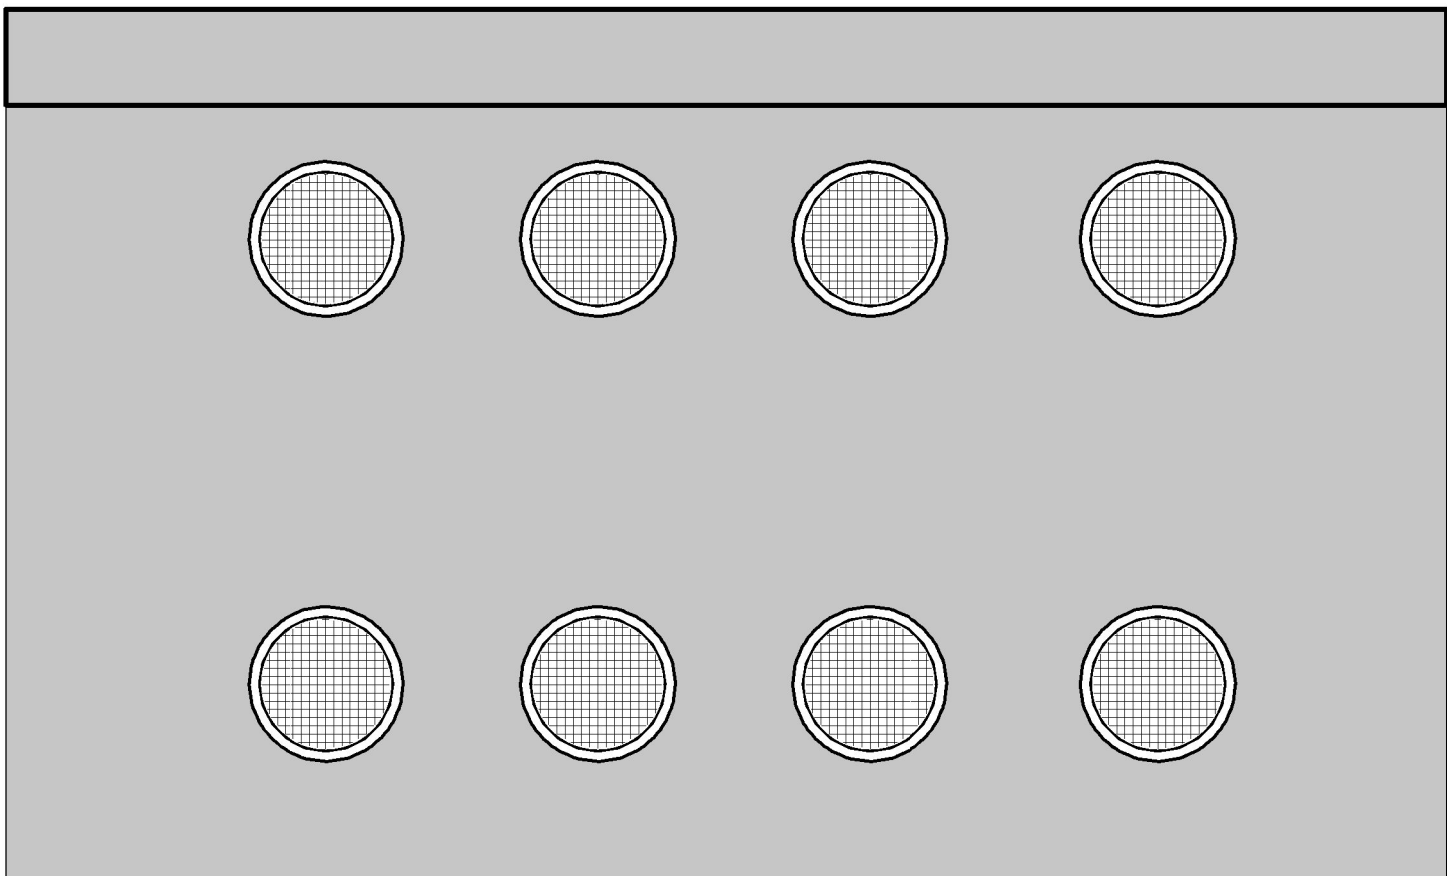


Boehringerstraße 14a
D-68307 Mannheim
Germany

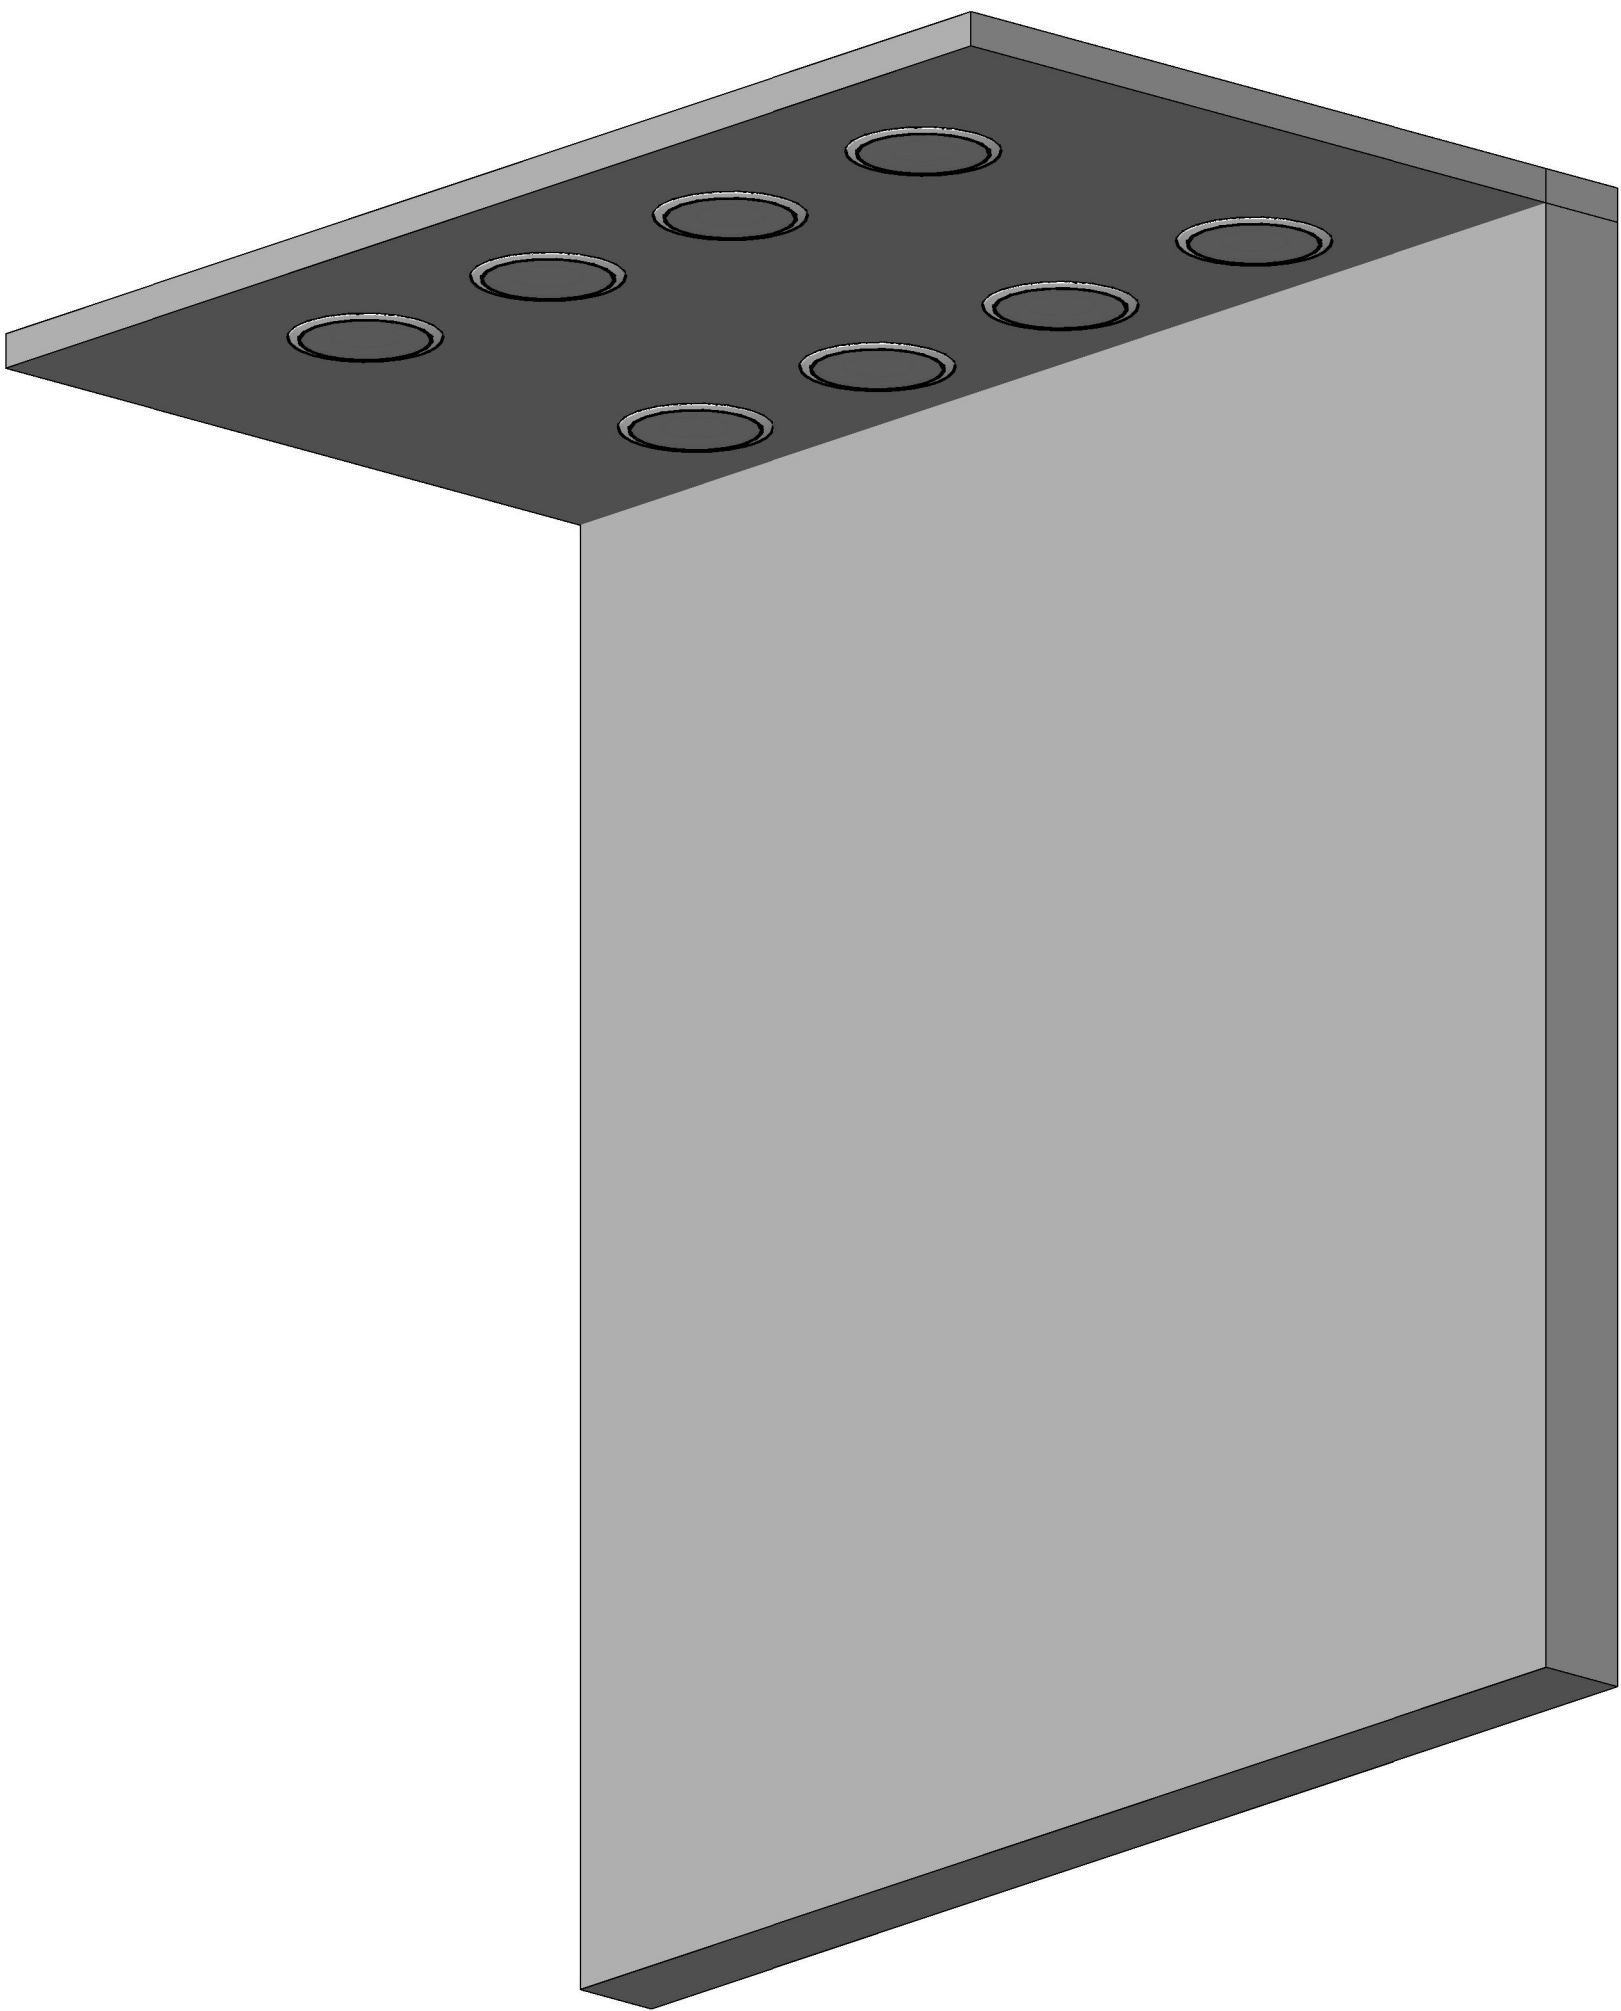

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.



Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
DL-E-AB 06-100/T-EN54 safe	A/B line Ceiling Speaker for Voice Alarm EN54	246x66 mm	IP21	103 - 20.100 Hz (single) / 107 - 19.600 Hz (double)	96 - 23.300 Hz (single) / 101 - 22.900 Hz(double)	single h/v 180° / double h/v 180°	single h/v 180° / double h/v 77°/137°	single h/v 150°/100° / double h/v 33°/90°	single h/v 180° / double h/v 180°	2.43 lbm	20142905