

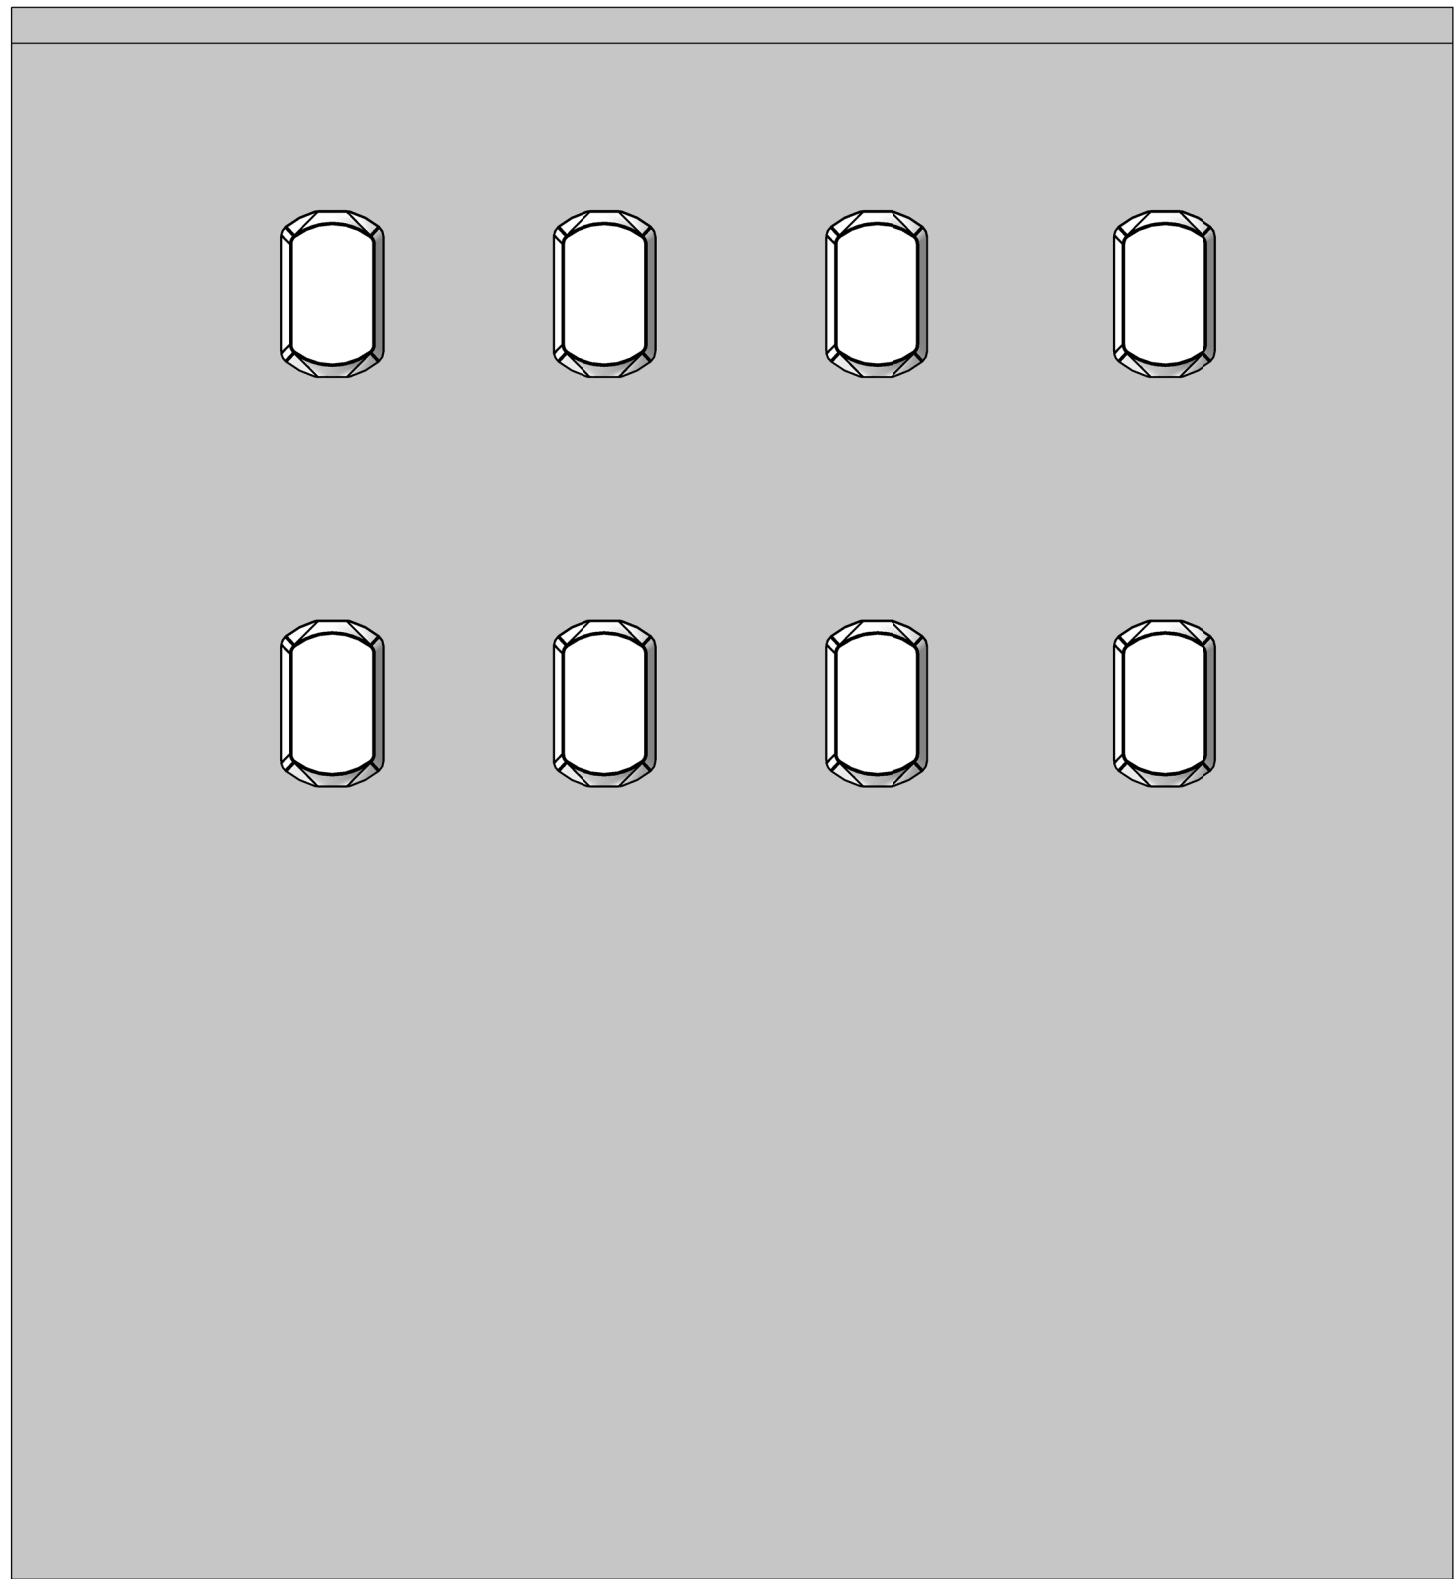


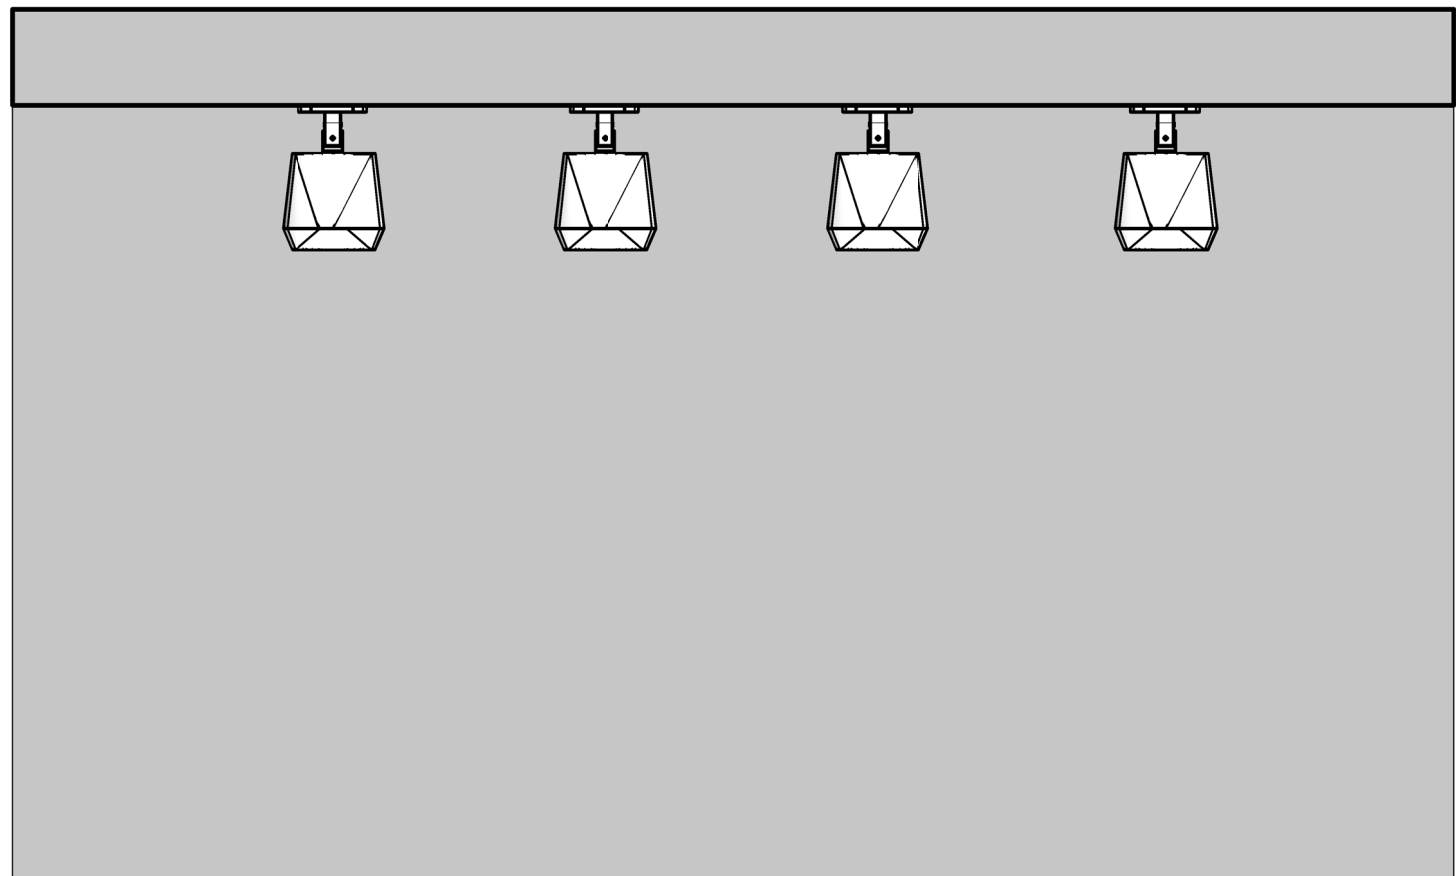


Boehringerstraße 14a
D-68307 Mannheim
Germany

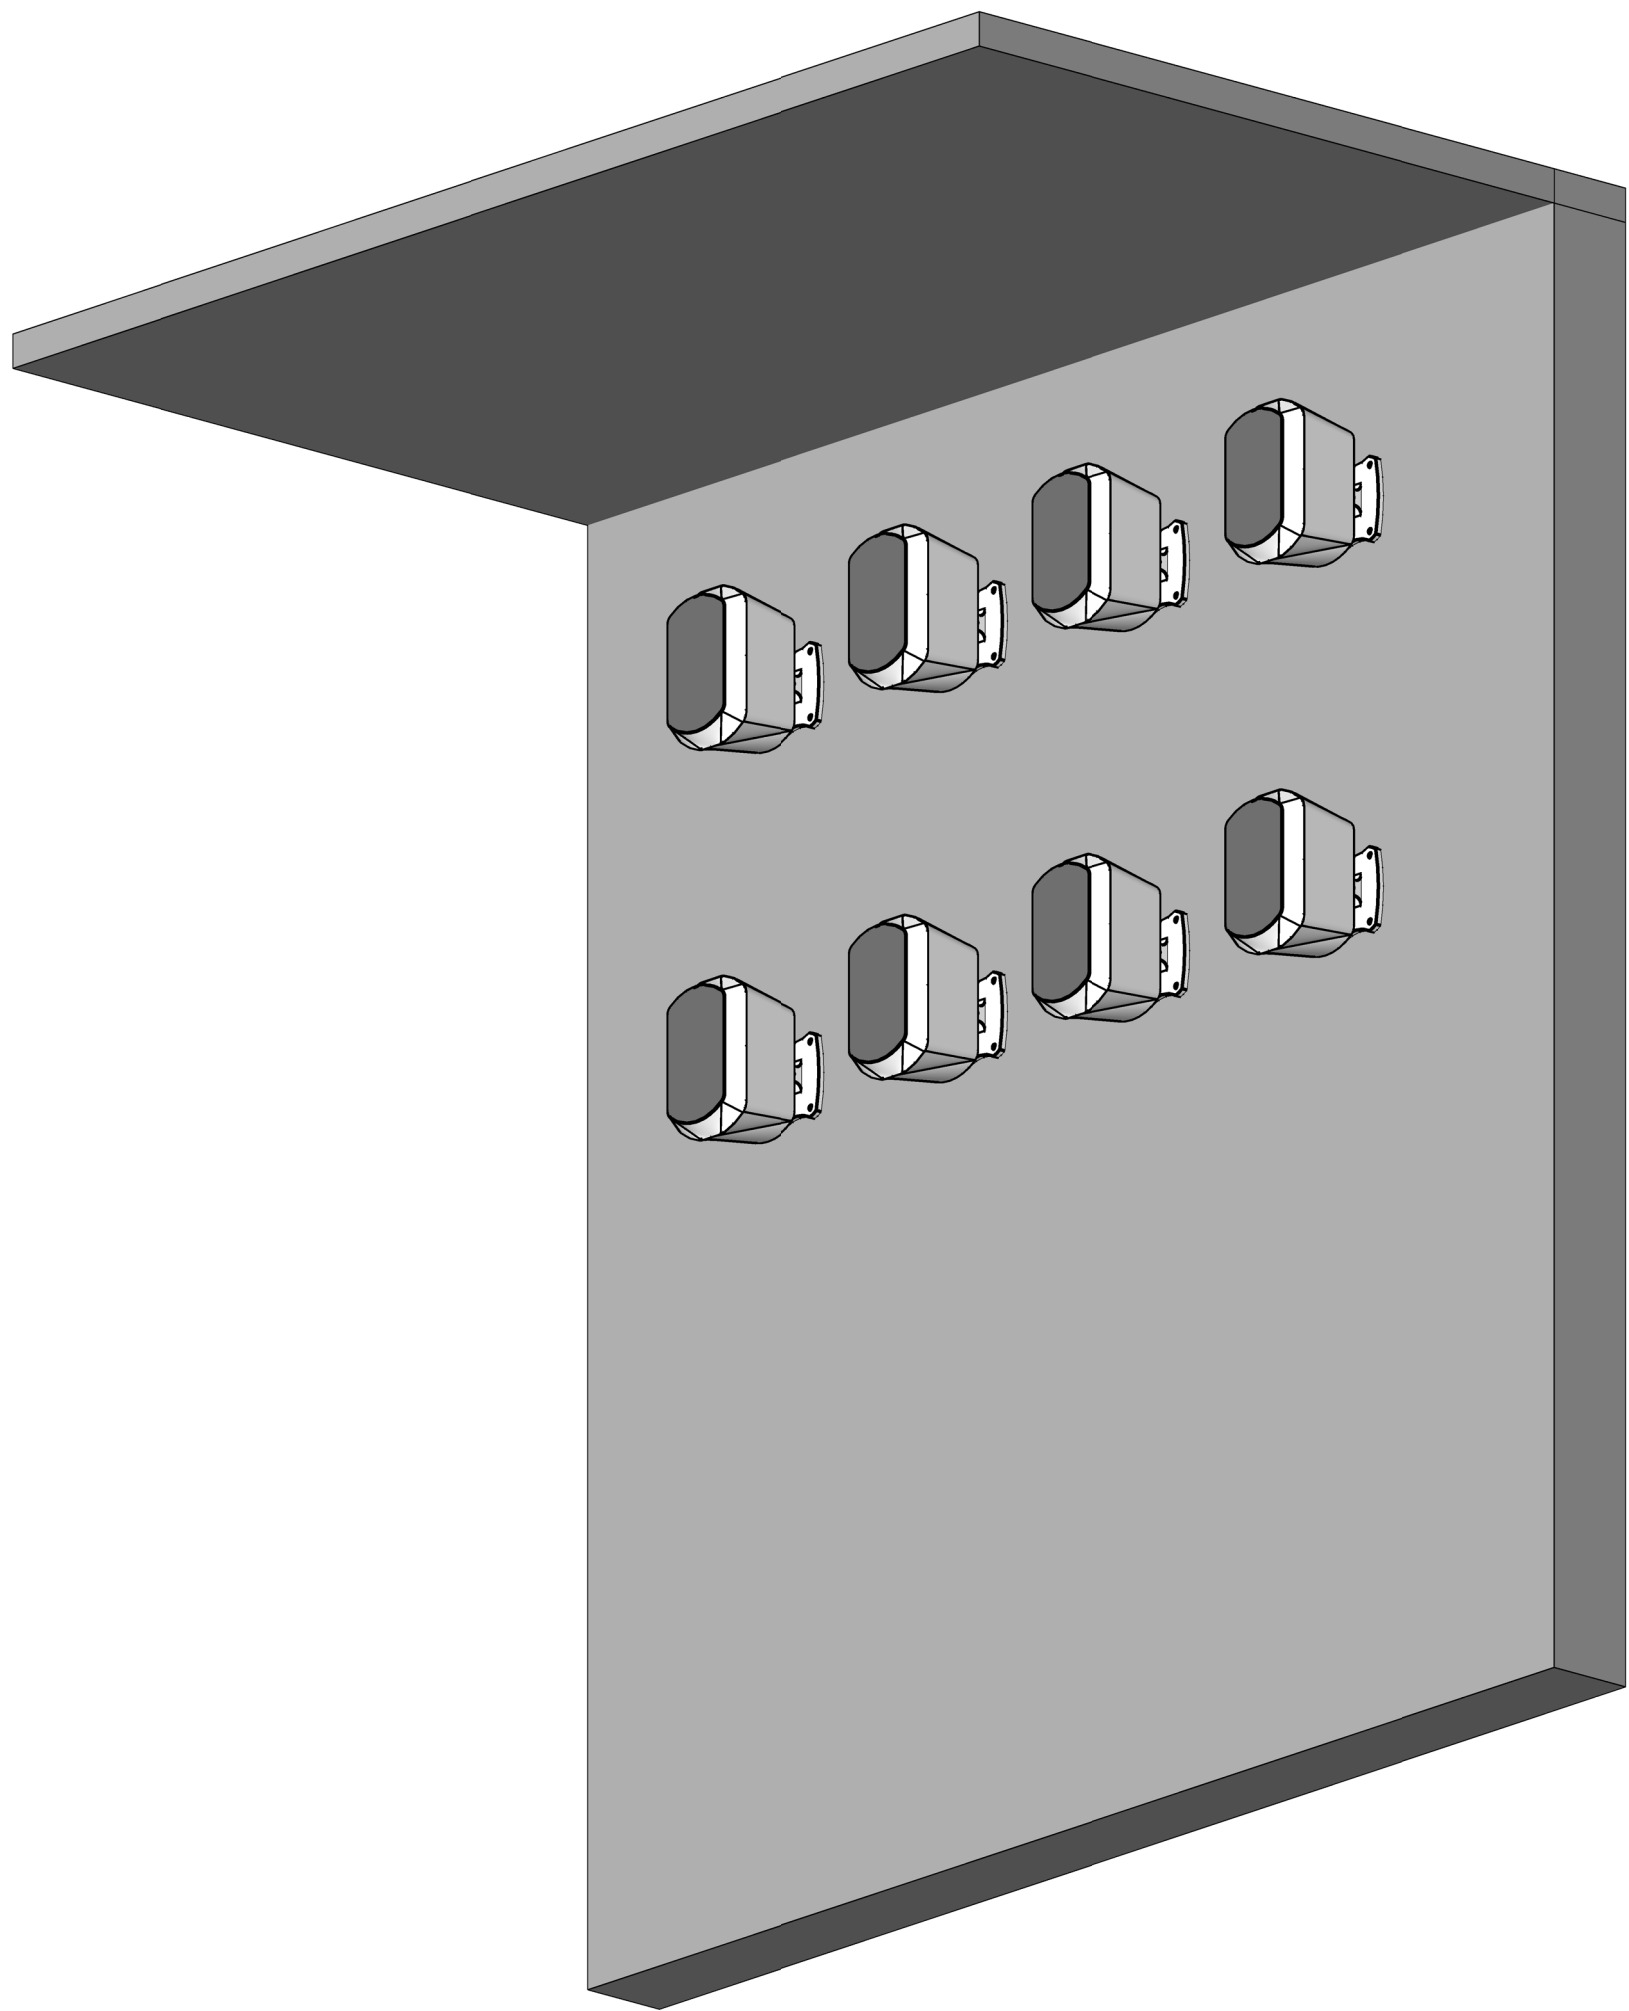

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

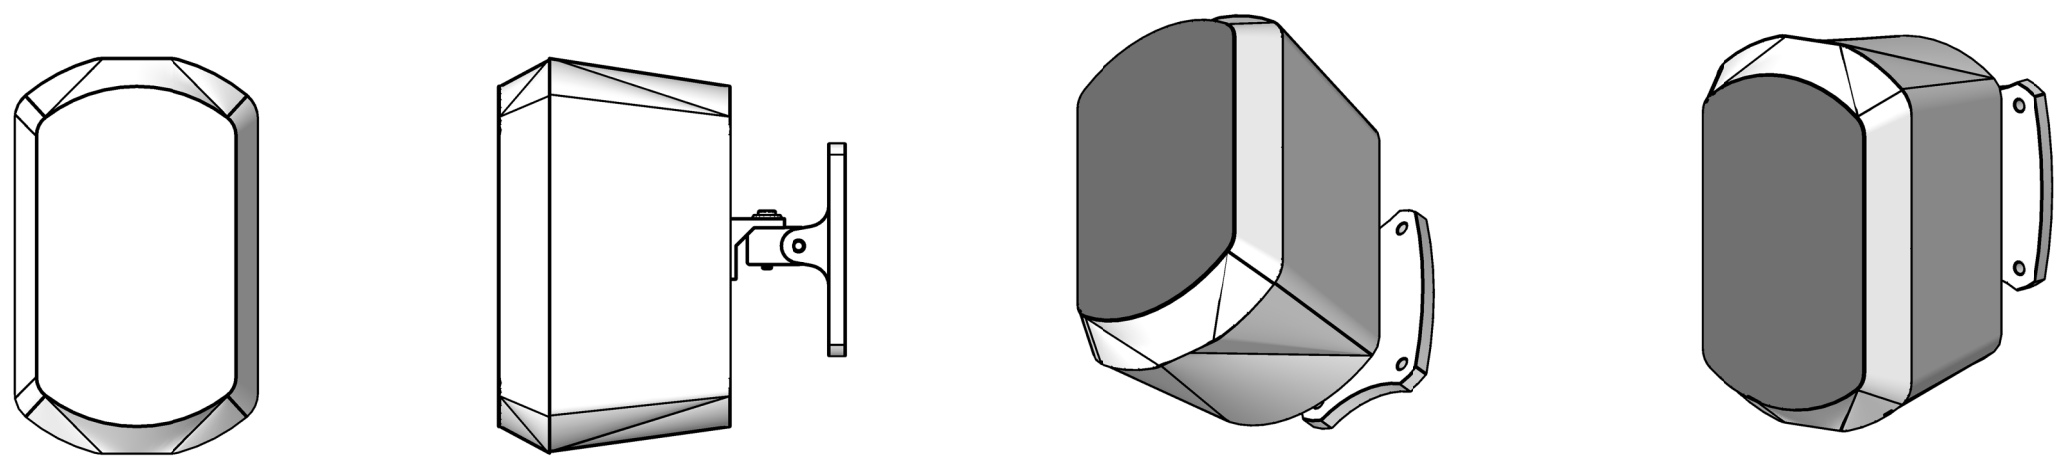

Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
MS 15-100/T white-EN54	2-Way-bassreflex monitor speaker for Voice Alarm EN54	210x130x120 mm	IP65	67 - 21.000 Hz	55 - 24.000 Hz	220° (h) 190° (V)	135° (h) 130° (V)	150° (h) 165° (V)	360° (h) 360° (V)	3.86 lbm	20122643