
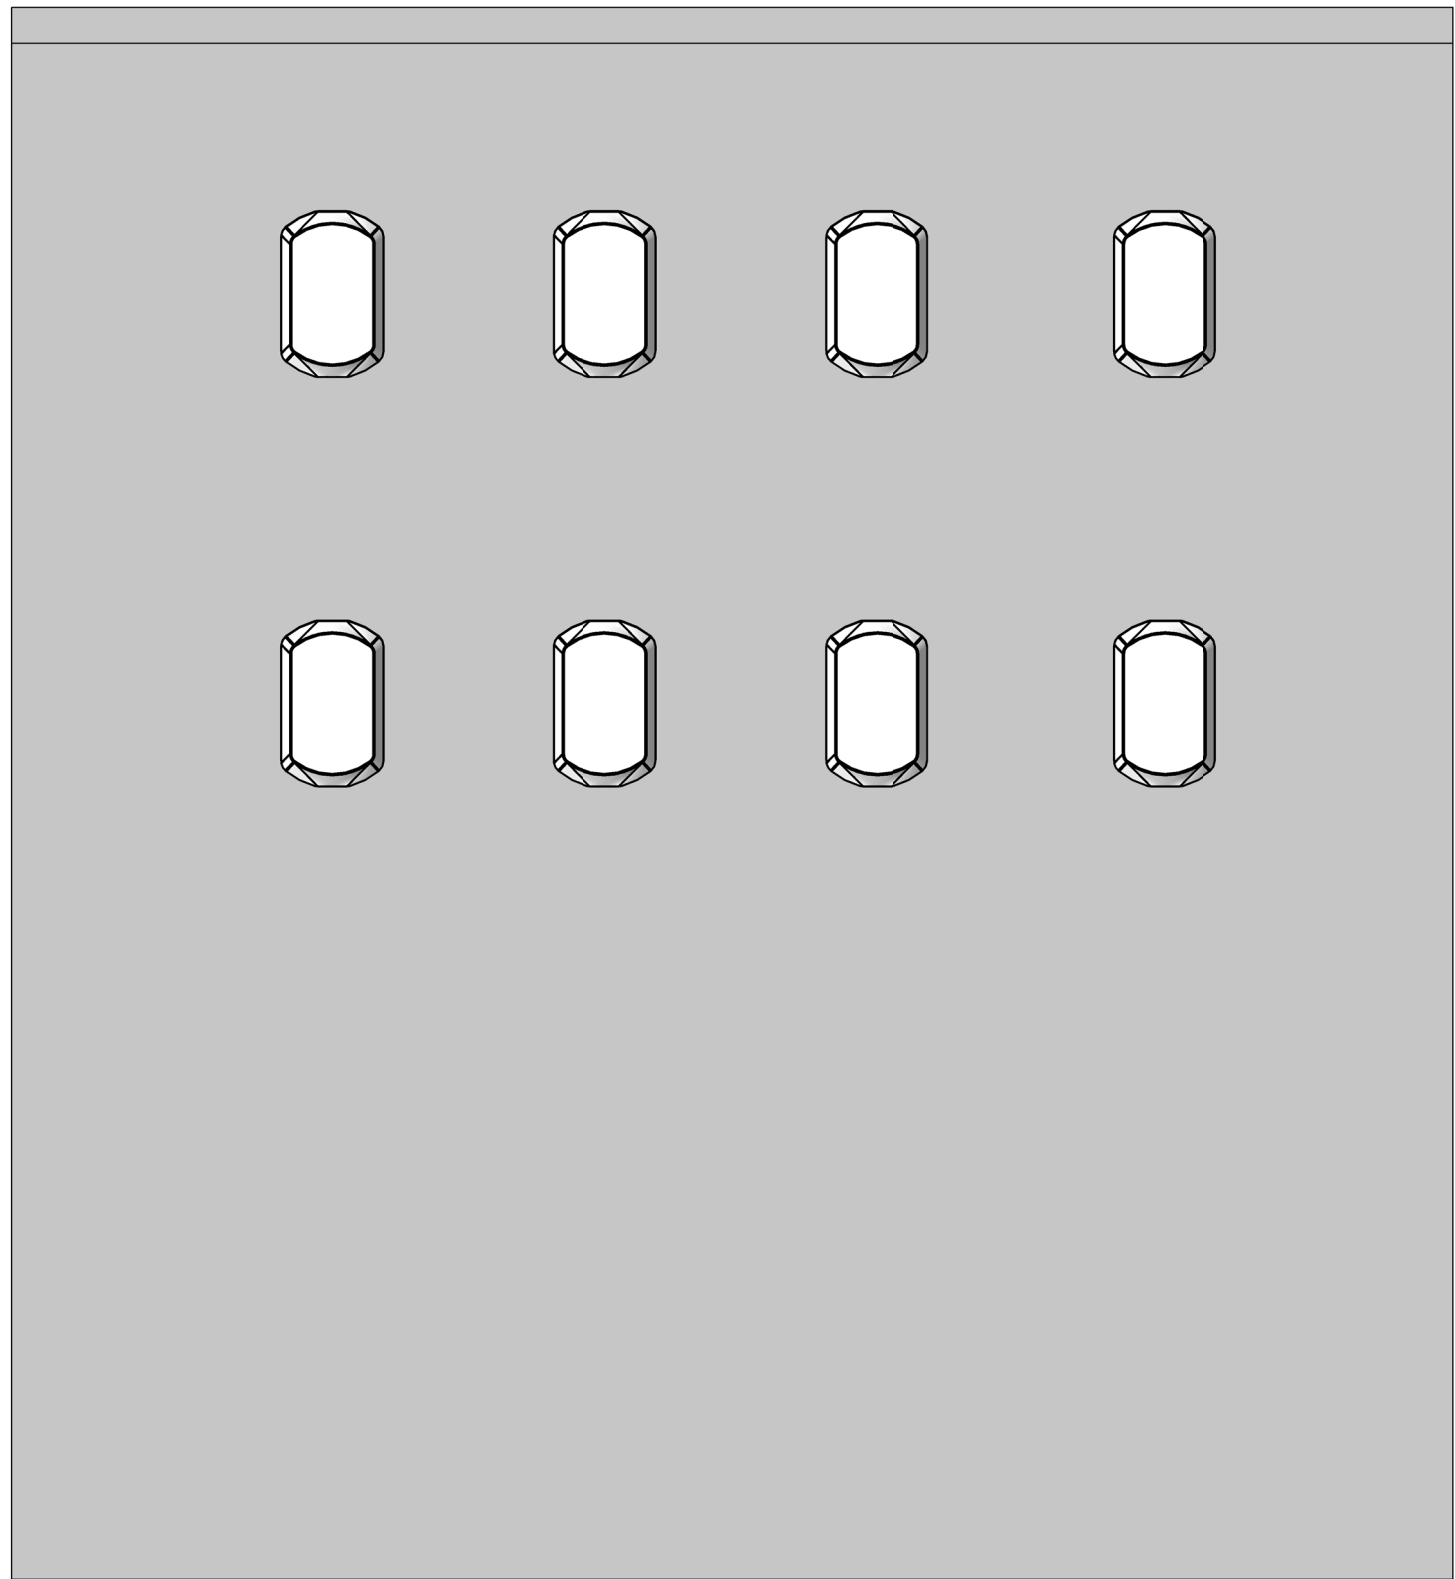
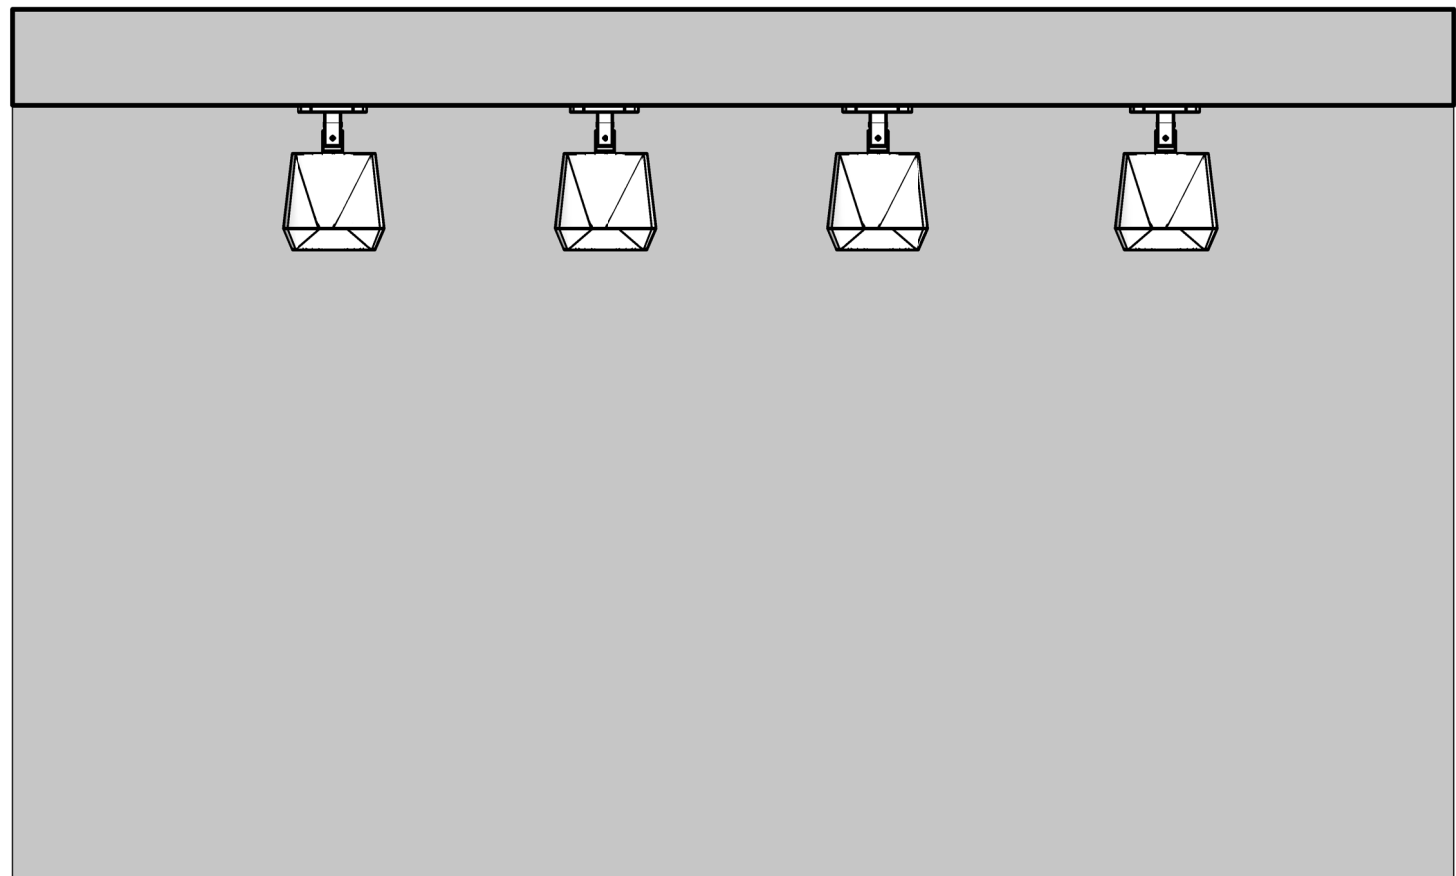



Boehringerstraße 14a
D-68307 Mannheim
Germany

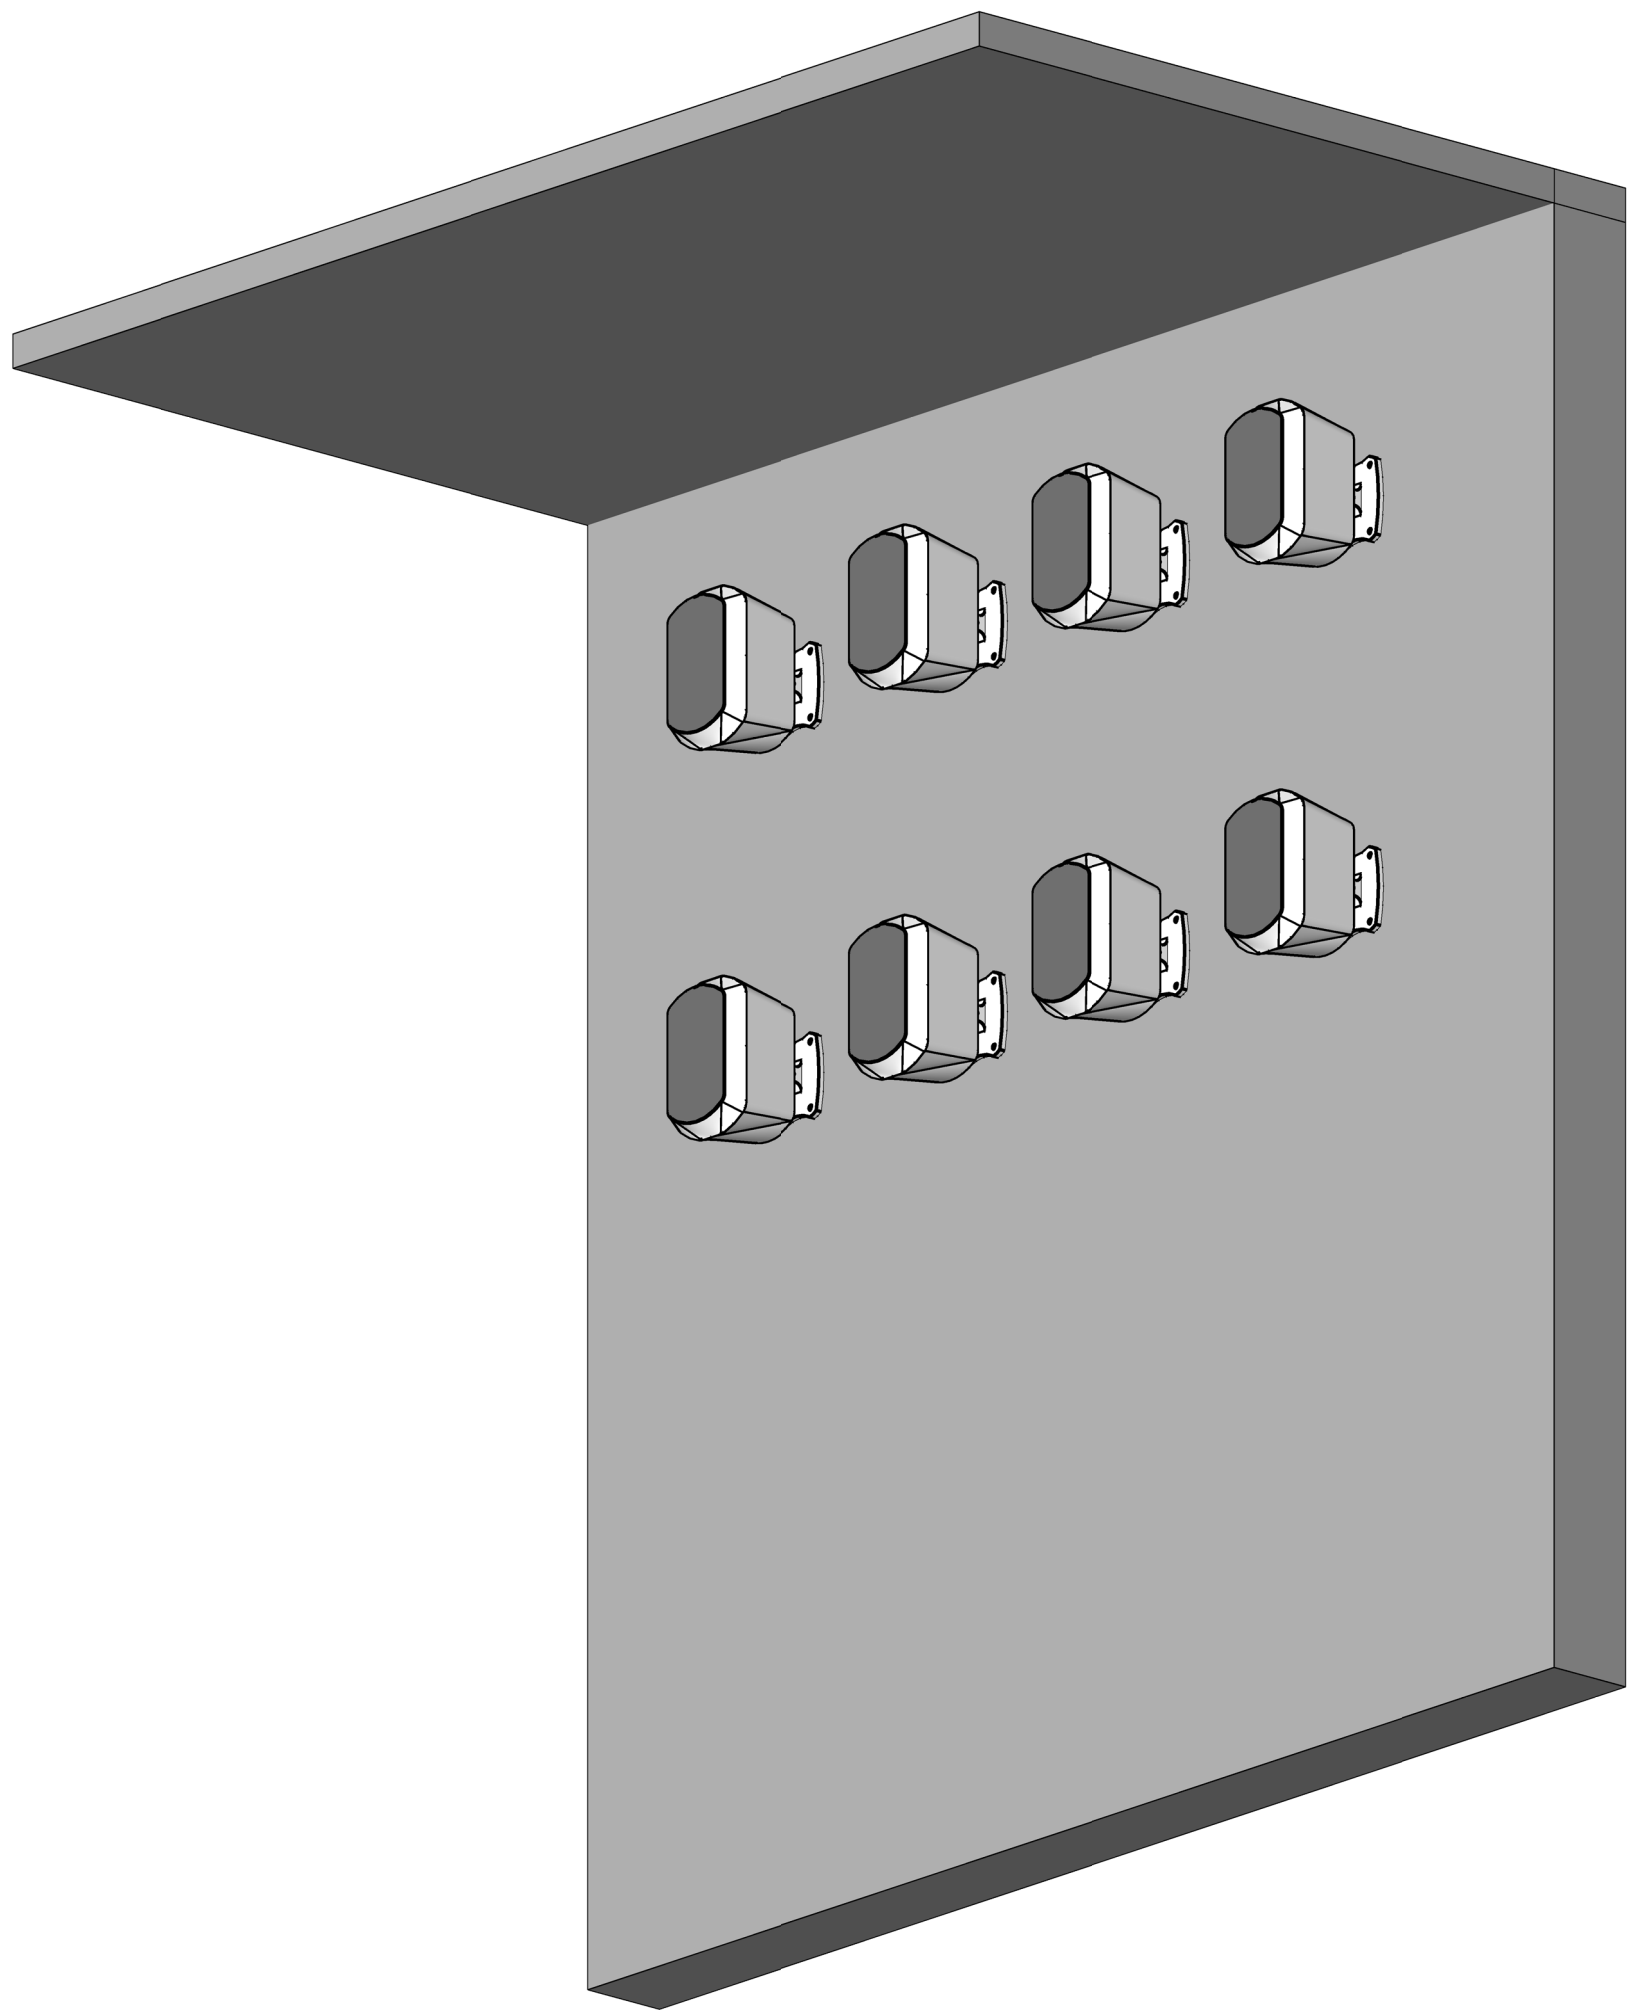

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

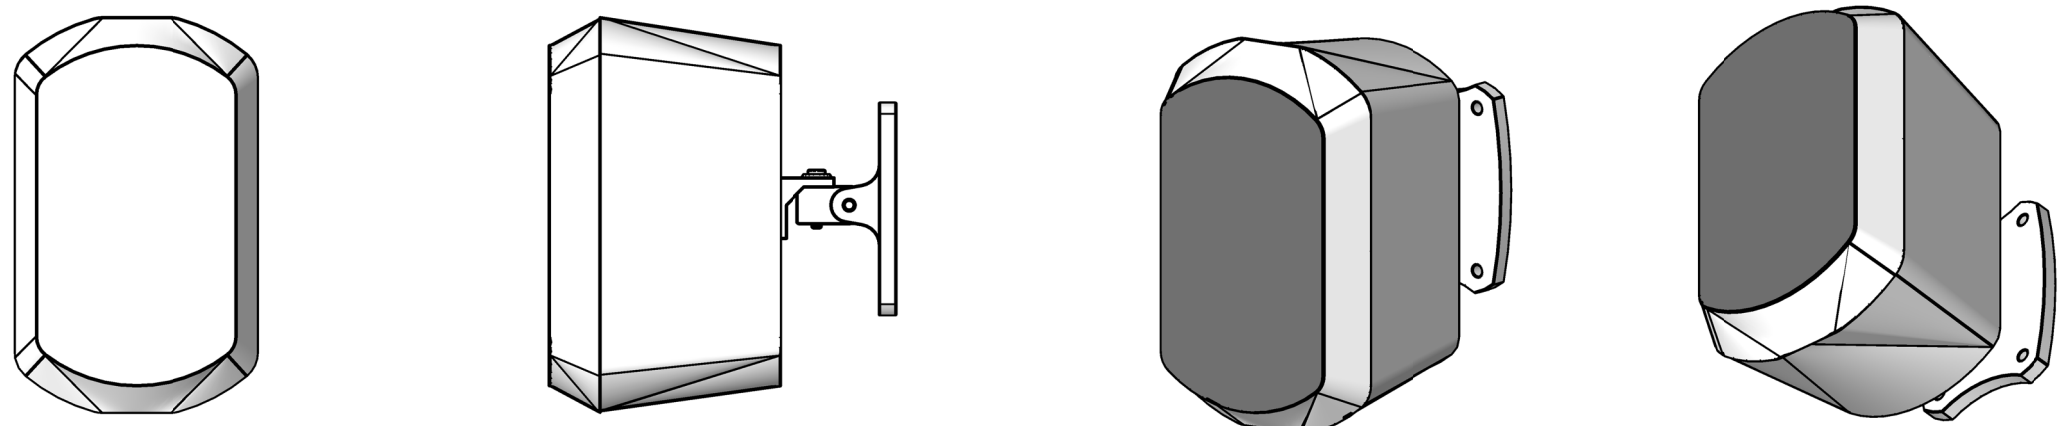

Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
MS 30-130/T-EN54 white	2-Way-bassreflex monitor speaker for Voice Alarm EN54	260x160x152 mm	IP65	60 - 24.000 Hz	50 - 25.000 Hz	200° (h) 160° (v)	130° (h) 100° (v)	120° (h) 40° (v)	360° (h) 360° (v)	5.51 lbm	20122645