
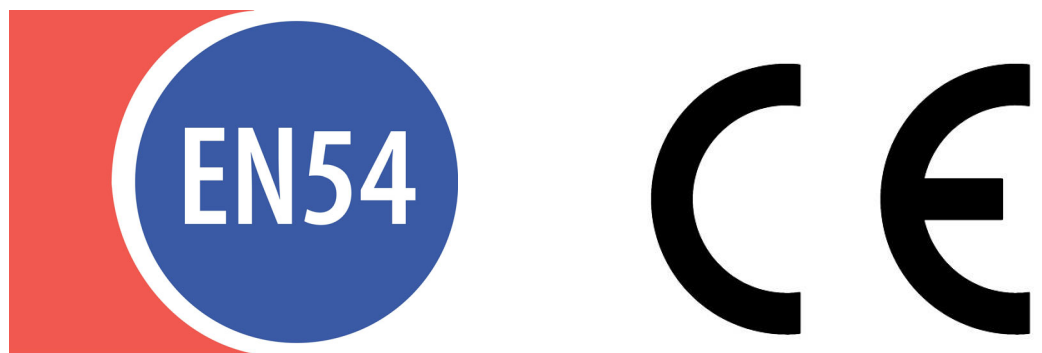
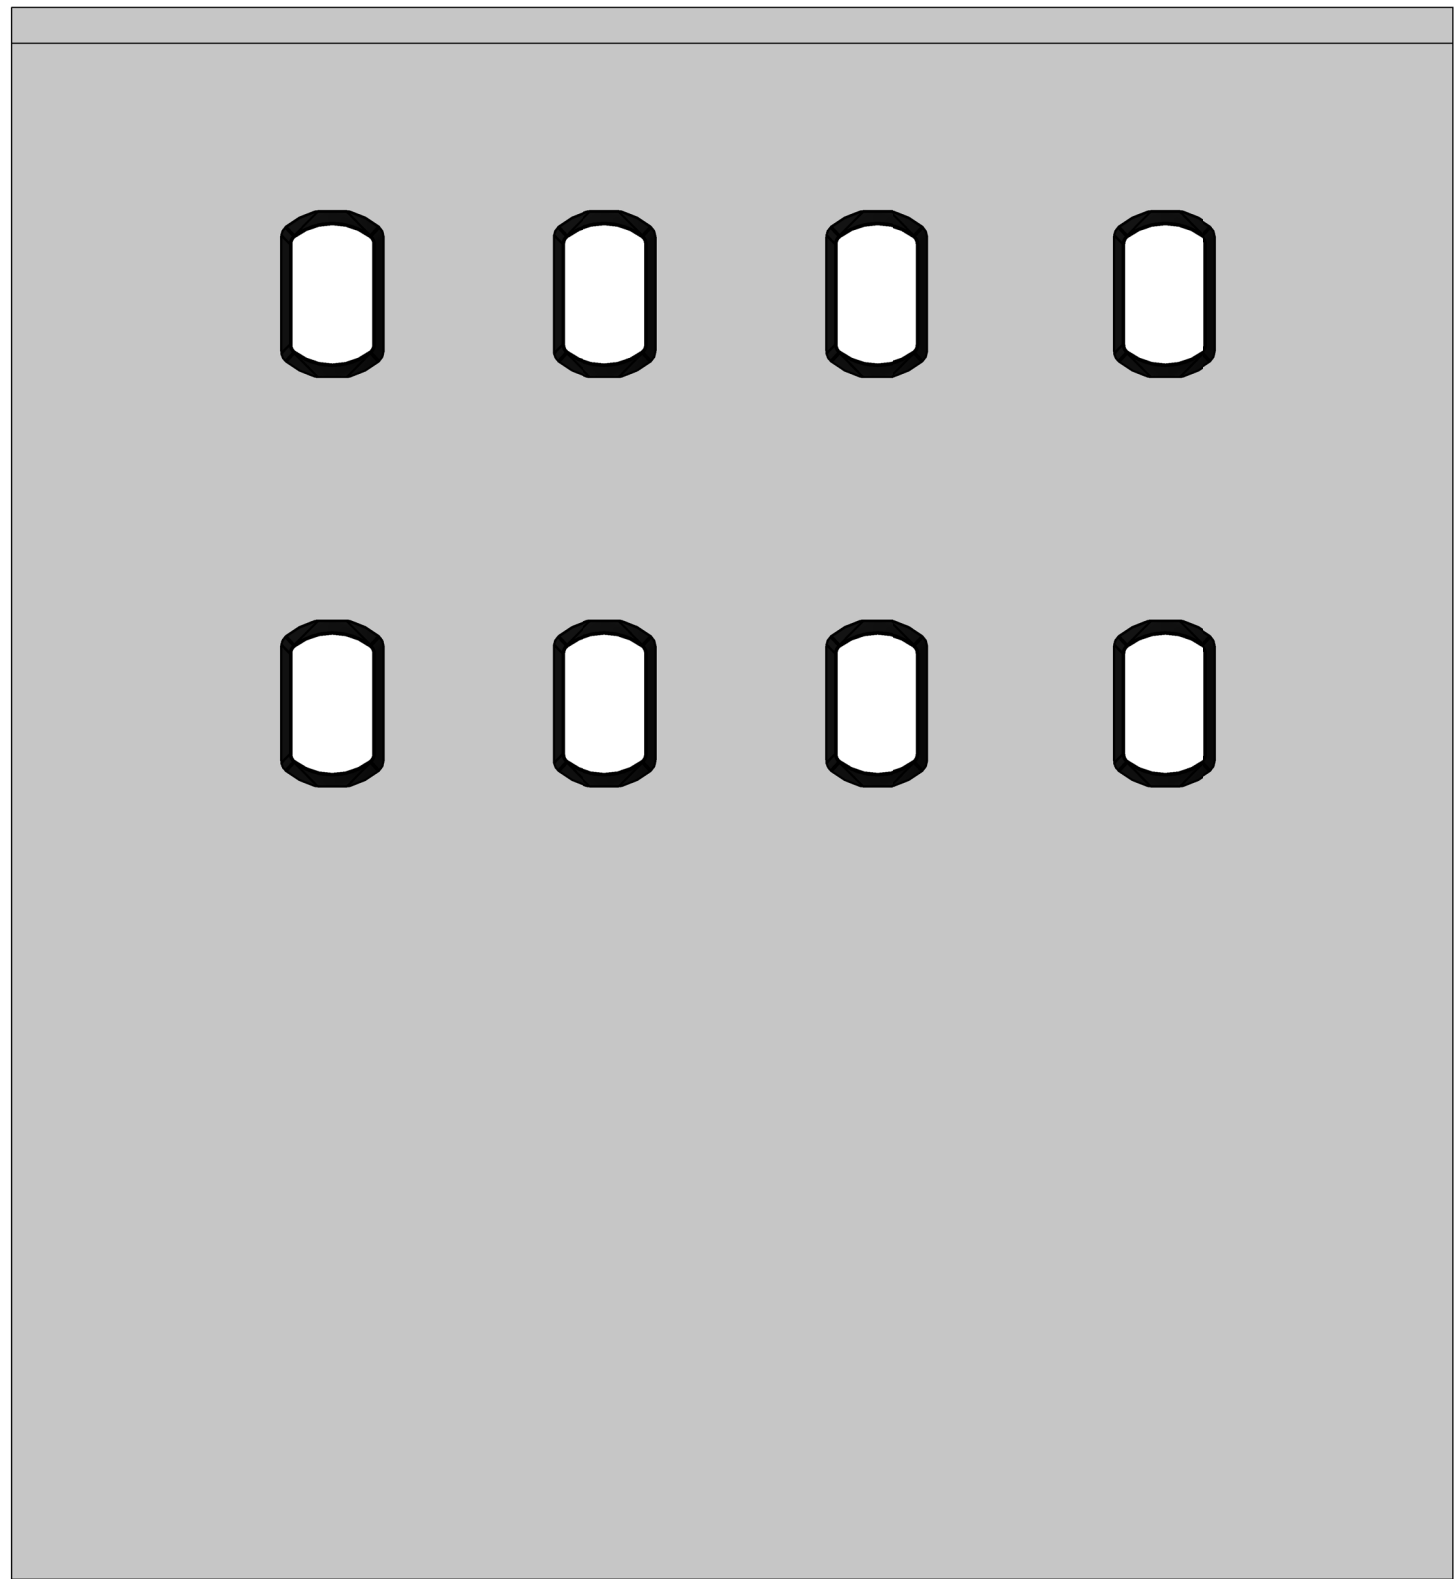
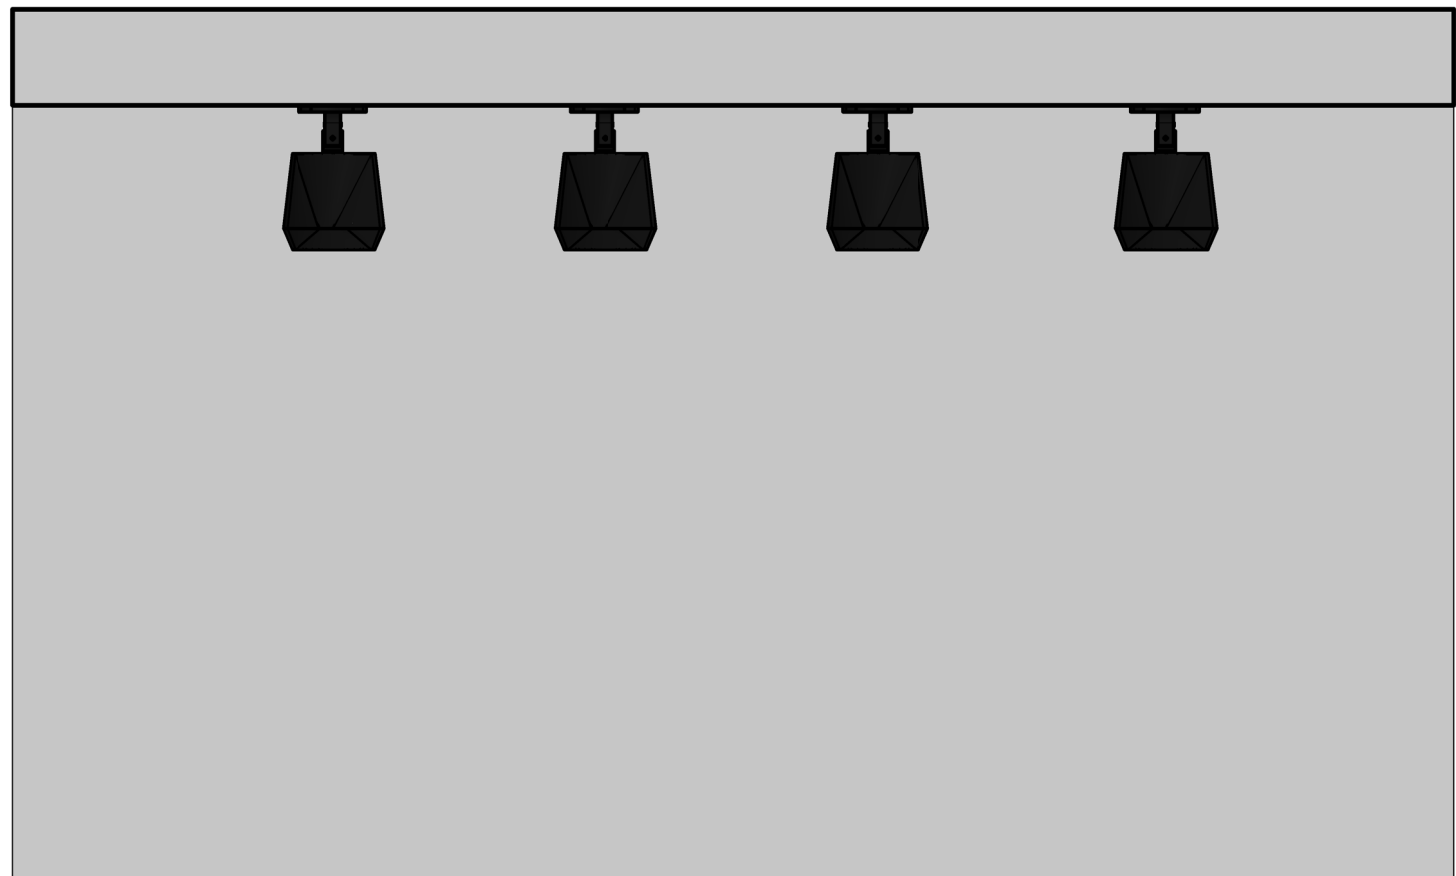



Boehringerstraße 14a
D-68307 Mannheim
Germany

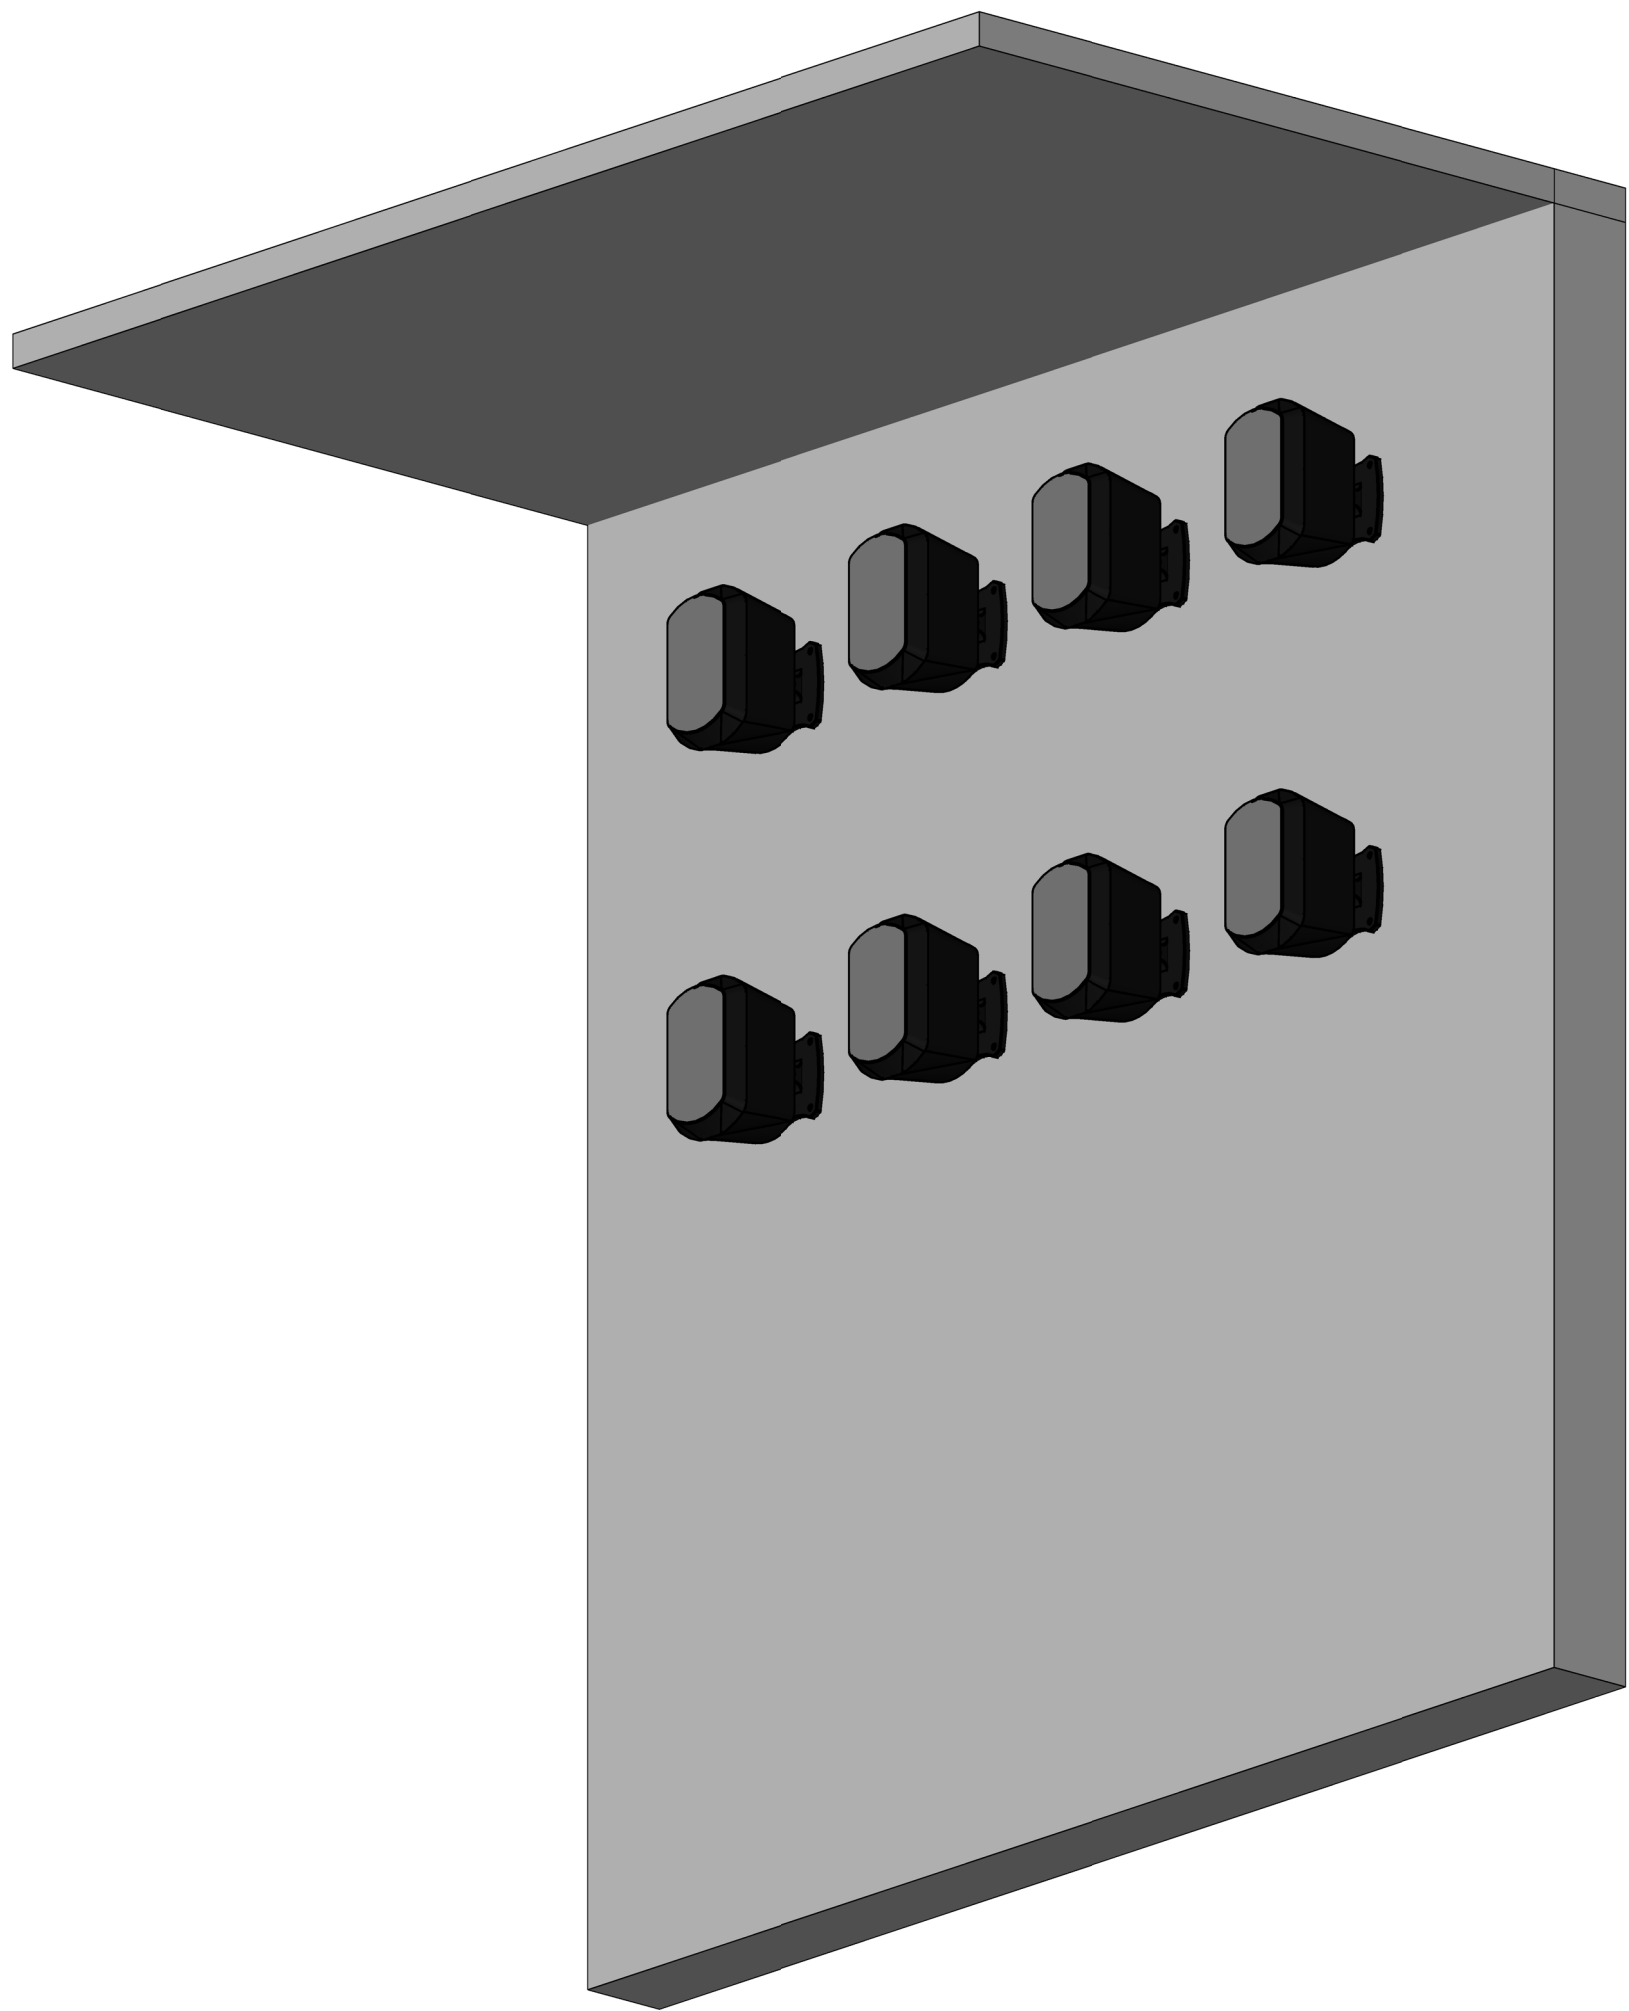

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

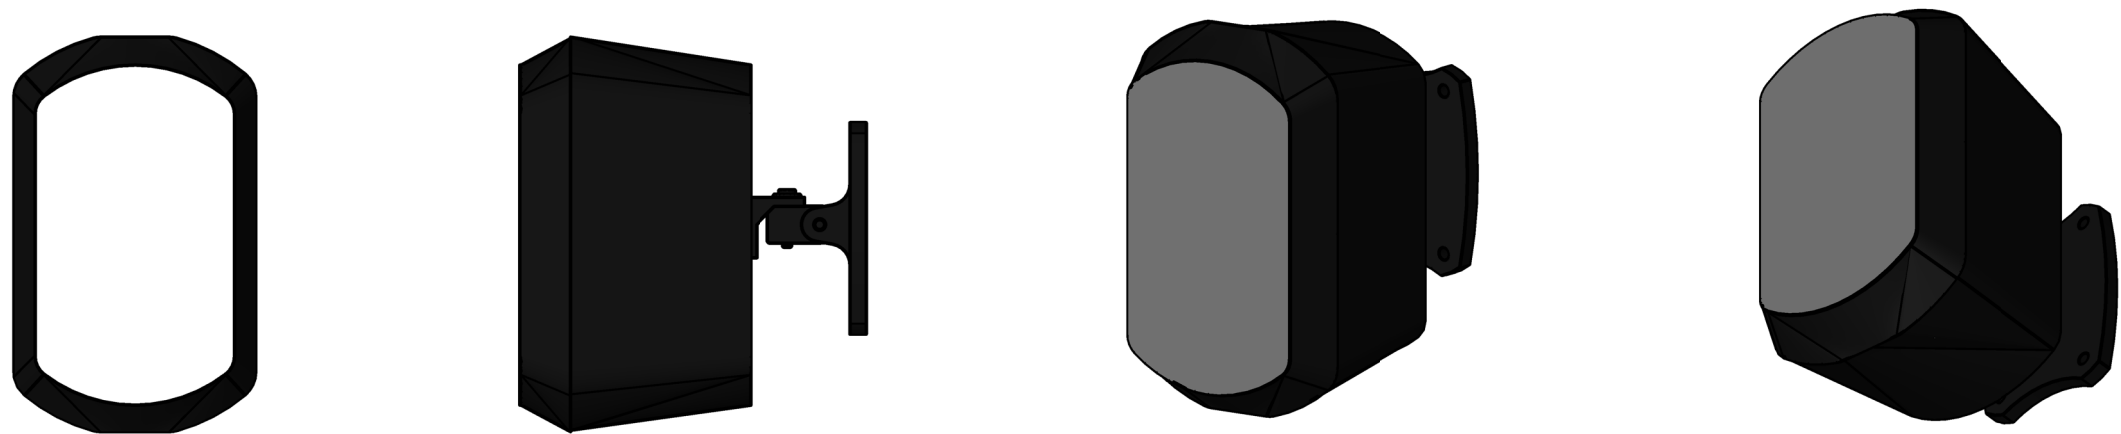

Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
MS 50-165/T black-EN54	2-Way-bassreflex monitor speaker for Voice Alarm EN54	326x202x192 mm	IP65	52 - 24.000 Hz	48 - 25.000 Hz	200 °(h) 155° (v)	110° (h) 120° (v)	80° (h) 25° (v)	360° (h) 360° (v)	8.05 lbm	20122648