





This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.


CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

All technical specifications, EASE-simulation-data and the DoP (Declaration of Performance) can be downloaded in the EN54 product section of our website www.ic-audio.com

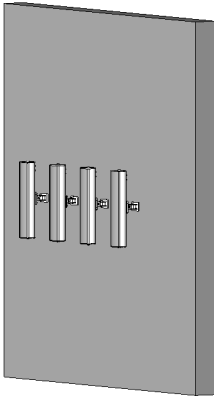

FLOOR PLAN
3/4" = 1'-0"



SOUTH
3/4" = 1'-0"

Level 1
0.00'

Wall Speaker Schedule-ic audio							
count	Manufacturer	Description	Model	Electrical Data	Ip rating	Weight	Part number
1	ic audio GmbH Germany	Weatherproof and ballproof sound column with swivel bracket for Voice Alarm EN54	TS-C 20-500_T-EN54	12 V/1-10 VA	IP66	2,80 kg	20122602
1	ic audio GmbH Germany	Weatherproof and ballproof sound column with swivel bracket for Voice Alarm EN54	TS-C 20-500_T-EN54	12 V/1-6 VA	IP66	2,80 kg	20122602
1	ic audio GmbH Germany	Weatherproof and ballproof sound column with swivel bracket for Voice Alarm EN54	TS-C 20-500_T-EN54	12 V/1-3 VA	IP66	2,80 kg	20122602
1	ic audio GmbH Germany	Weatherproof and ballproof sound column with swivel bracket for Voice Alarm EN54	TS-C 20-500_T-EN54	12 V/1-2 VA	IP66	2,80 kg	20122602

Frequency Range
217 - 16.900 Hz