

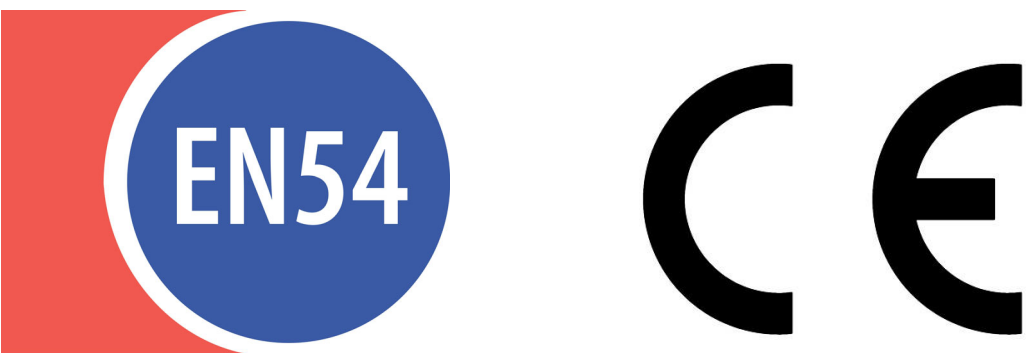
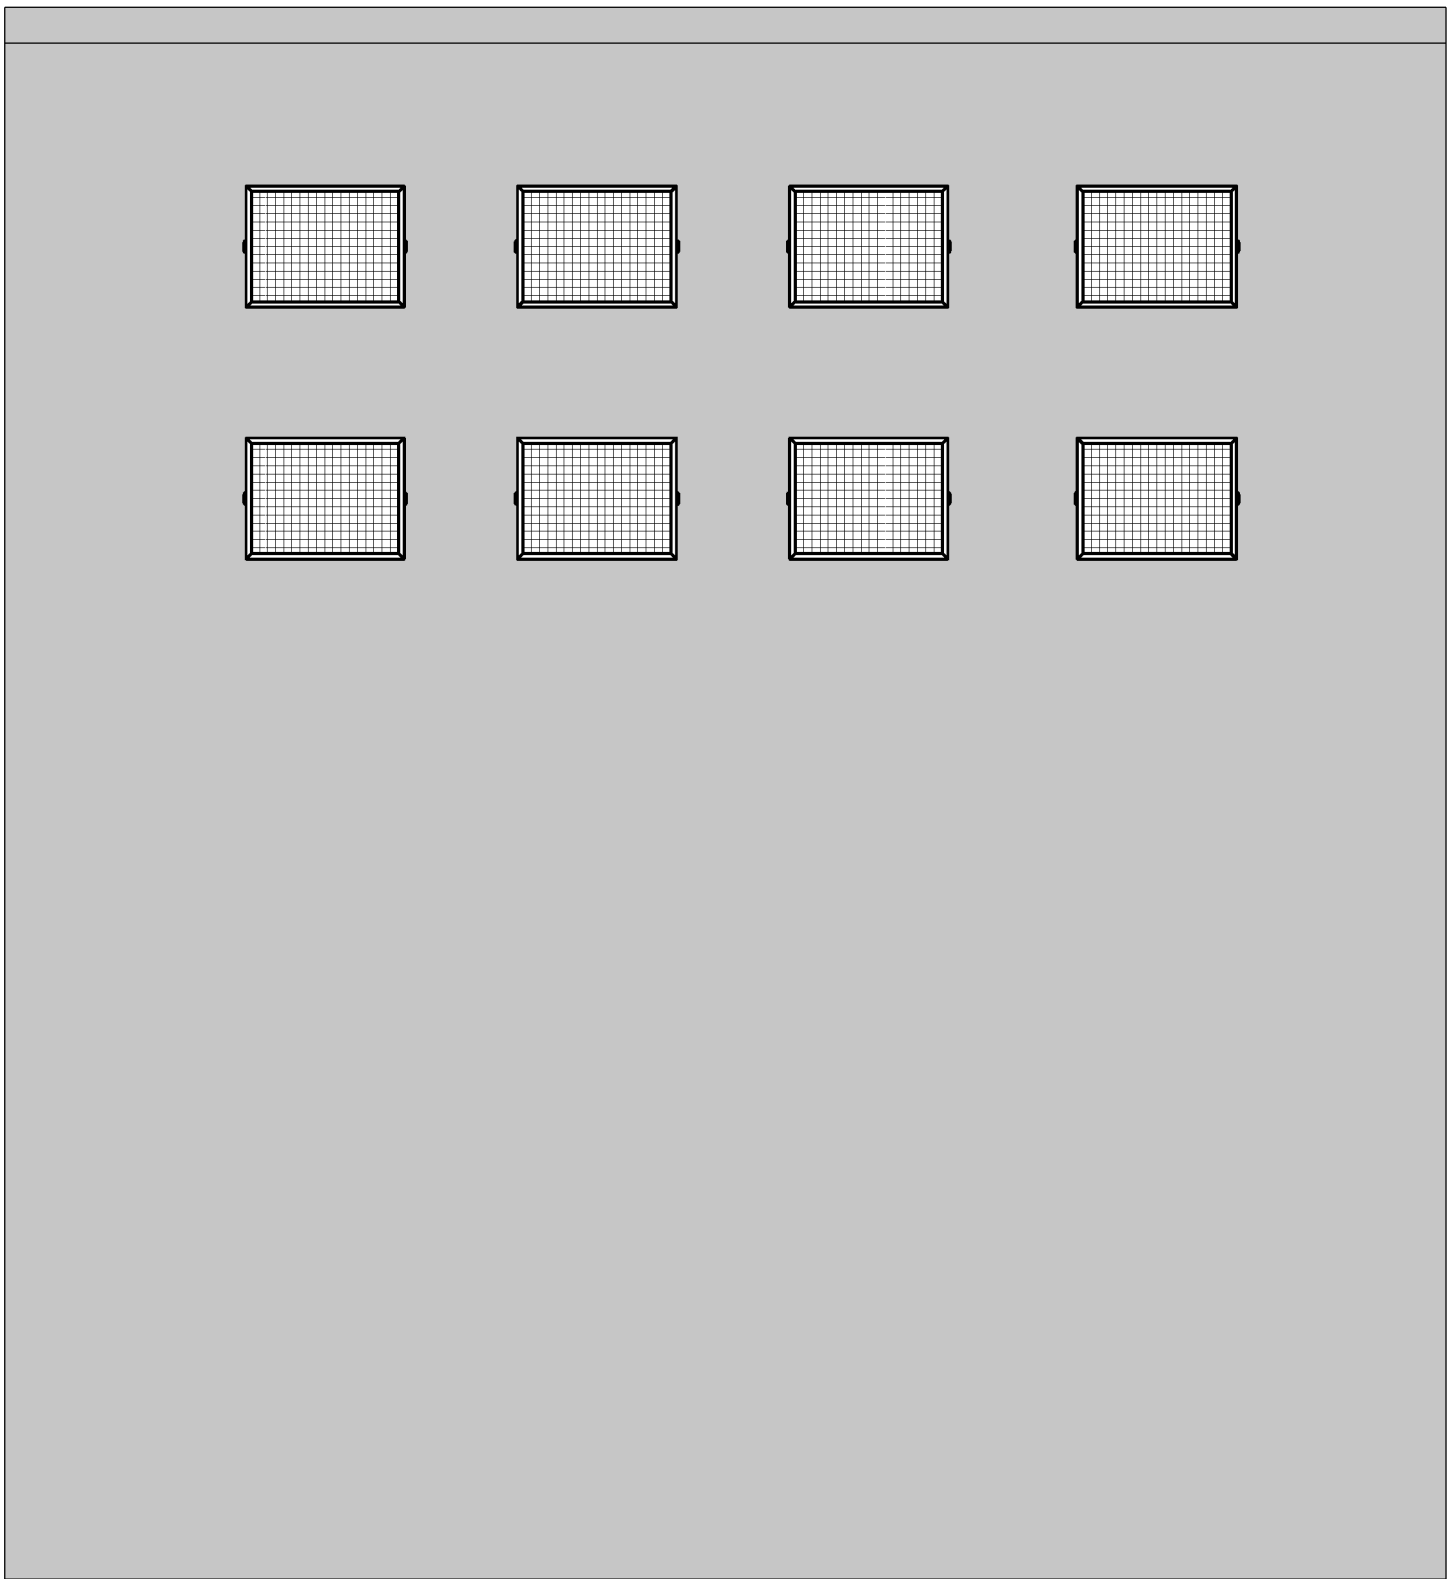



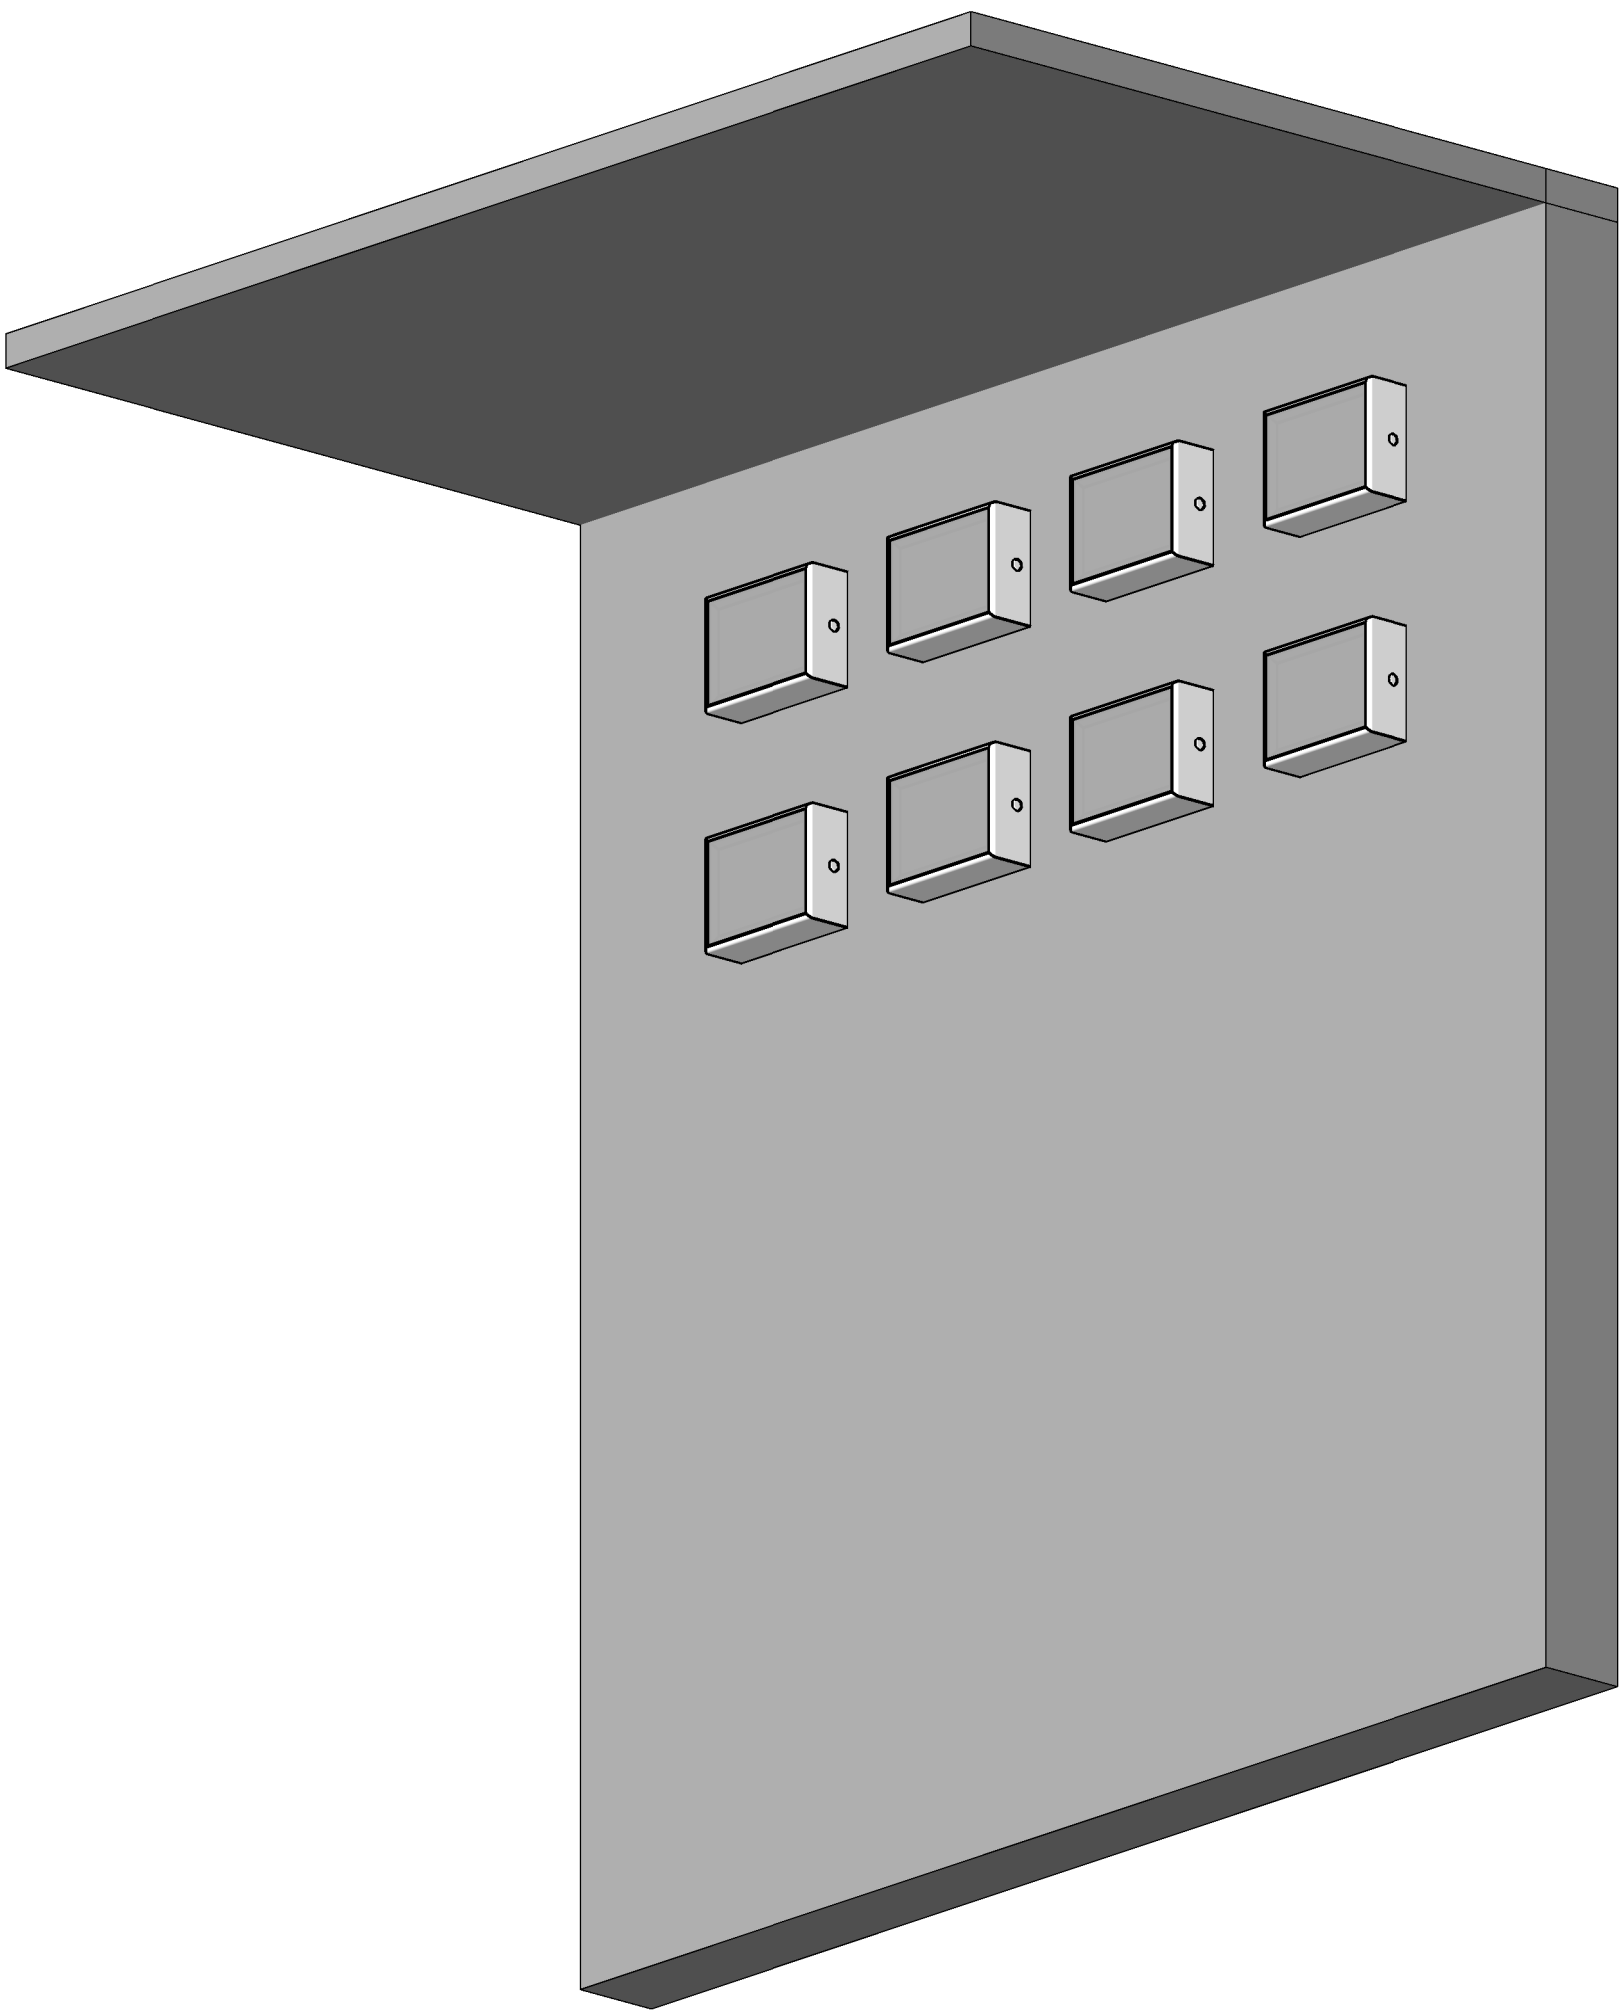

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

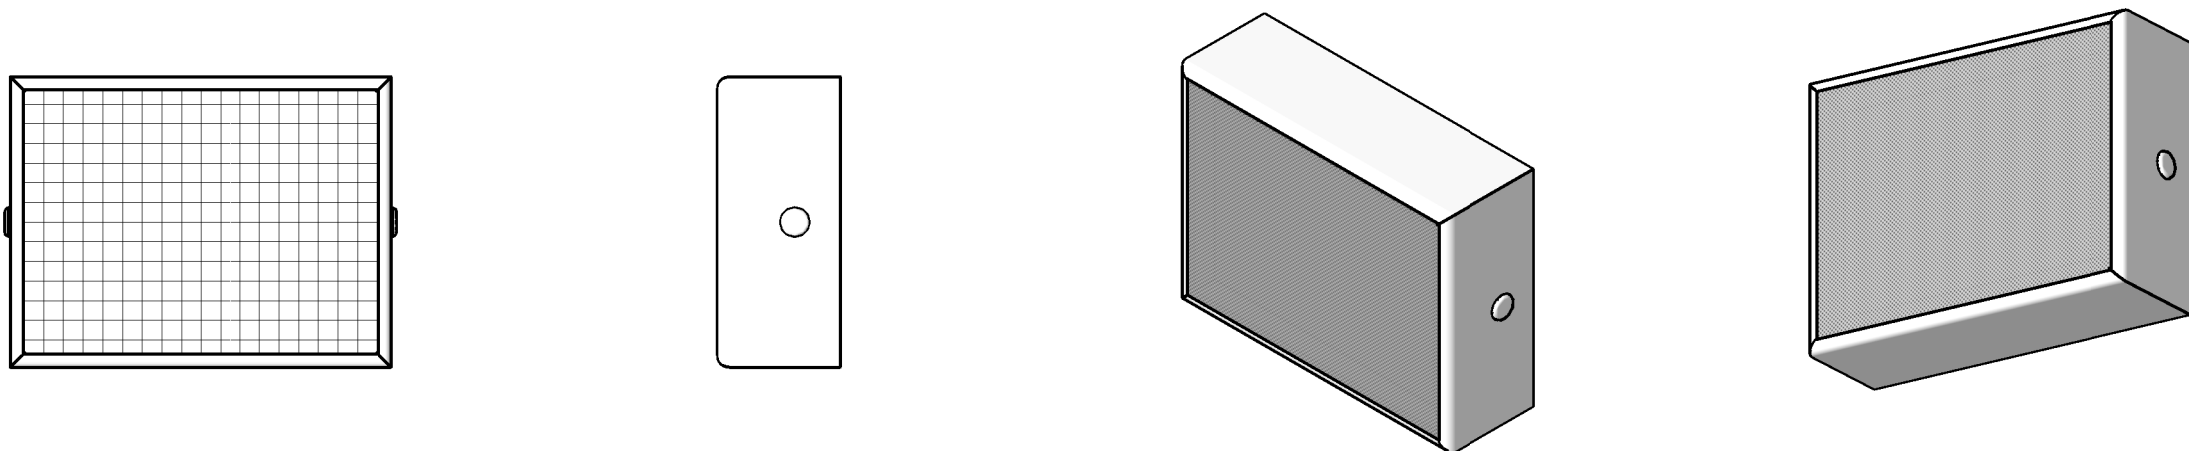

Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
WA-AB 06-100/T-EN54	A/B line Ceiling speaker for Voice Alarm EN54	252x194x82 mm	IP54	227 - 14.600 Hz (single) 224 - 14.300 Hz (double)	165 - 23.500 Hz (single) 162 - 23.500 Hz (double)	single h/v 180°/160° double h/v 145°/130°	single h/v 150°/135° double h/v 90°/80°	single h/v 105°/90° double h/v 50°/40°	single h/v 175° double h/v 180°	4.94 lbm	20102183