
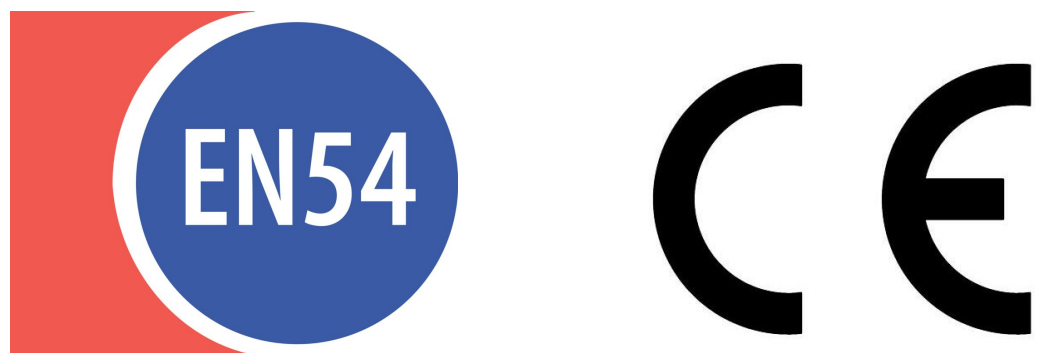
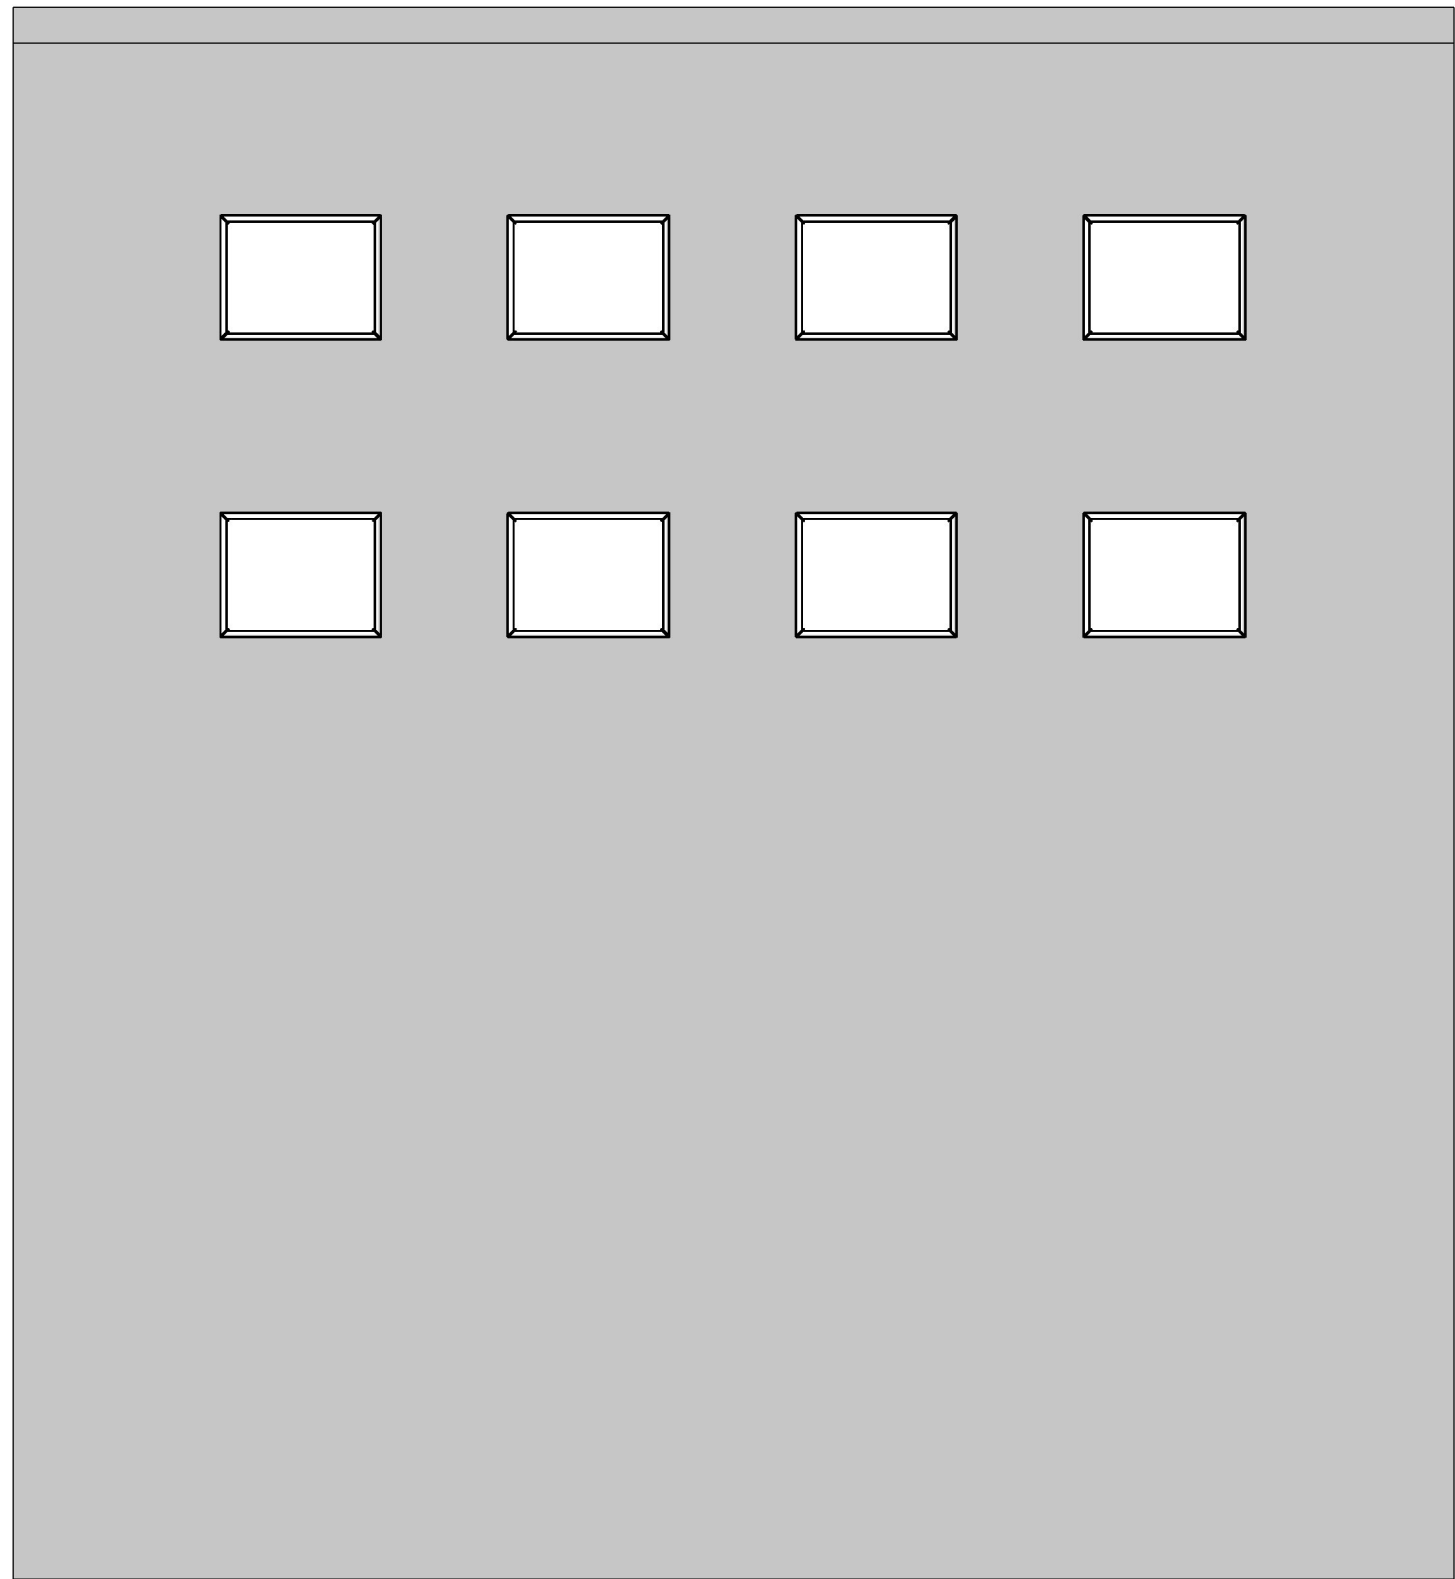



Boehringerstraße 14a
D-68307 Mannheim
Germany

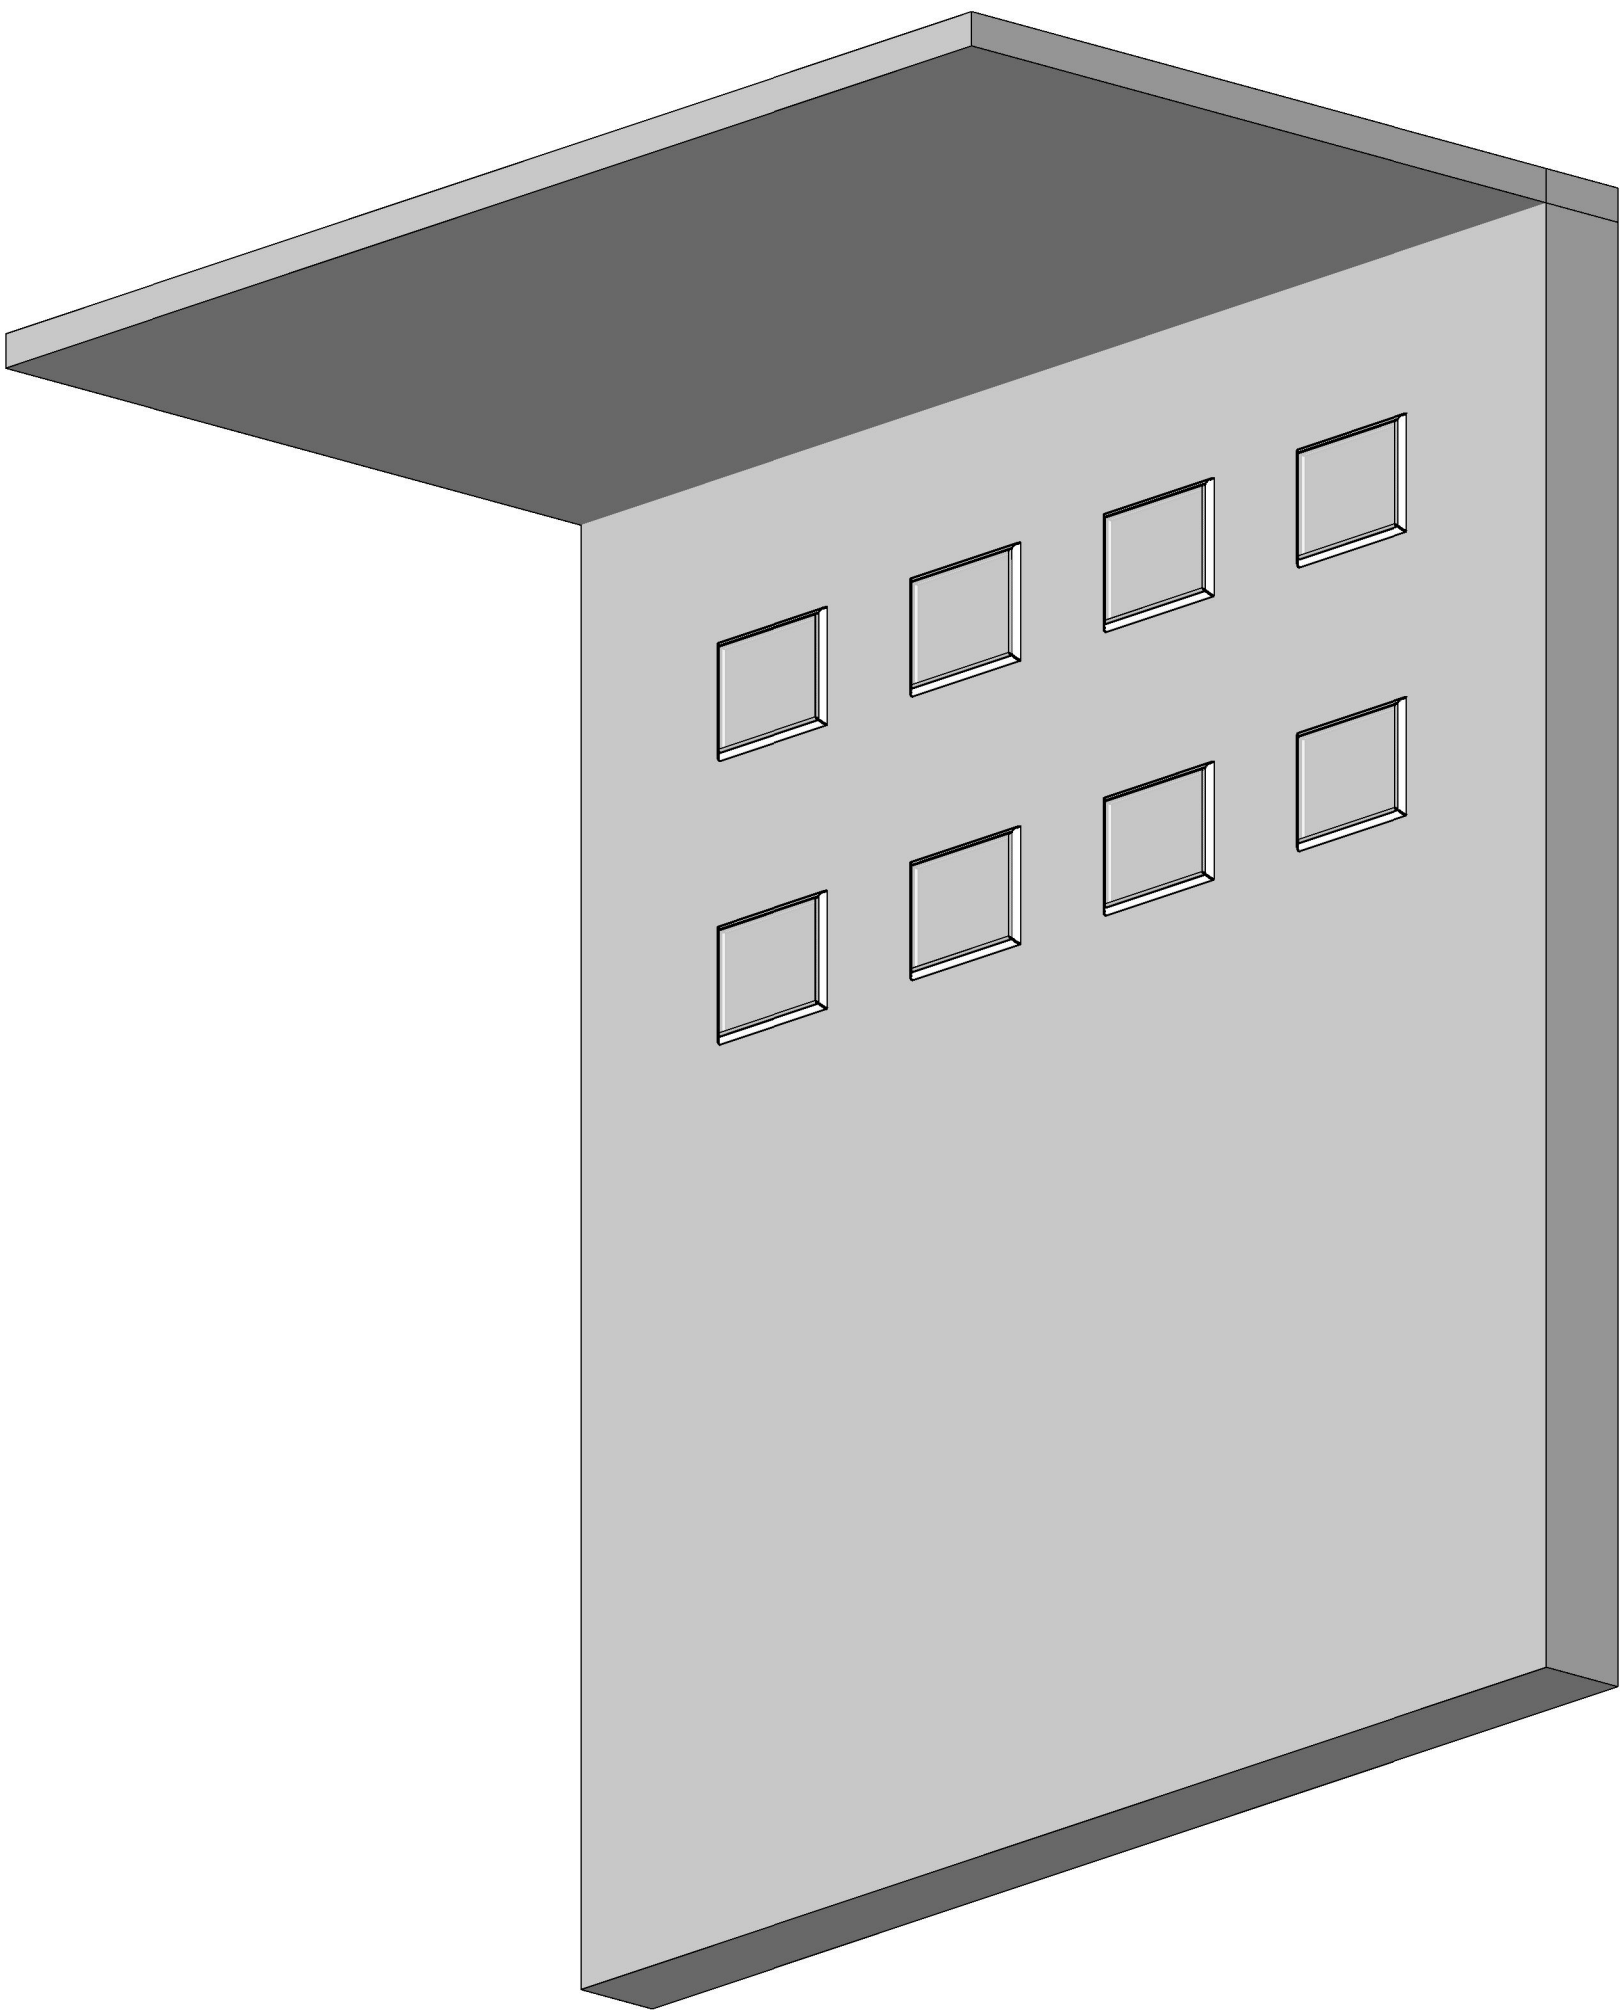

This is a high-quality loudspeaker certified for EN54 voice alarm systems for fire detection and fire alarm systems for buildings.

CE marking according to the Construction Products Regulation EU N° 305/2011.

The performed type testing, the initial inspection of the manufacturing plant and the factory production control with continuous surveillance assessment and approval of the factory production control is done by a notified body.

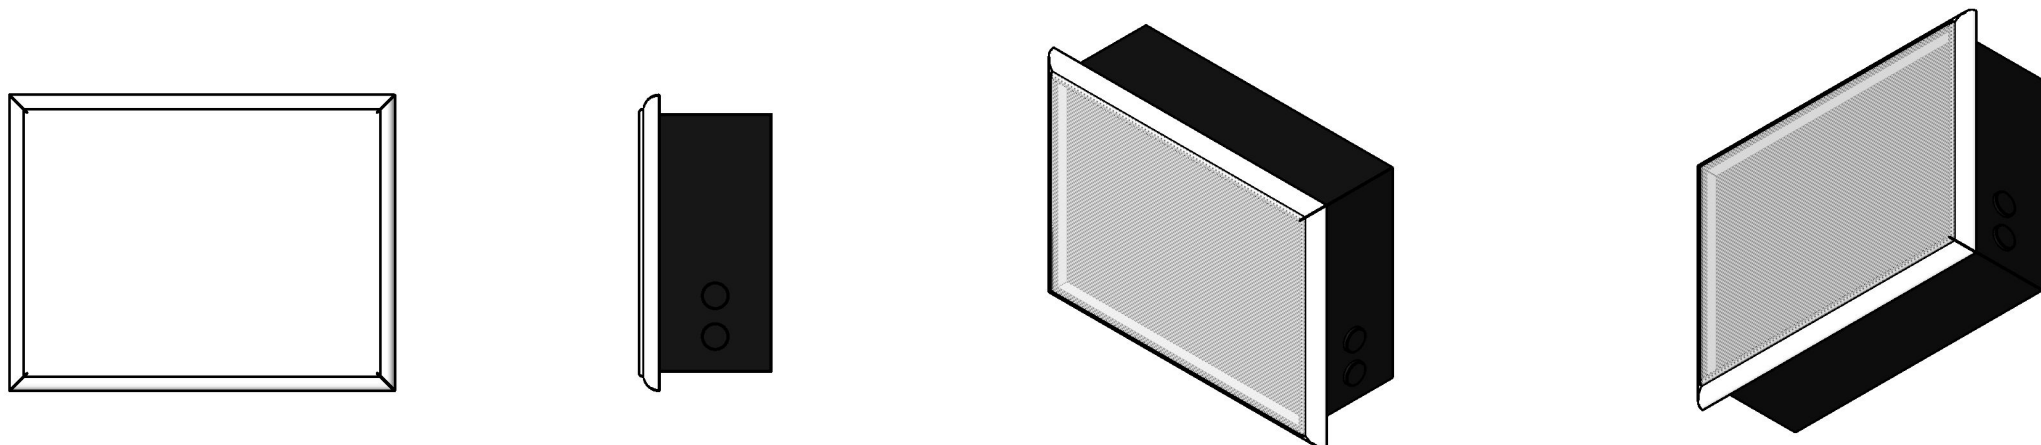

Model	Description	Dimensions	IP rating	Frequency Range	Frequency Response	Dispersion -6dB, 1KHz	Dispersion -6dB, 2KHz	Dispersion -6dB, 4KHz	Dispersion -6dB, 500Hz	Weight	Part Number
WU-AB 06-100/T-EN54	Flush mounted A/B line speaker for voice alarm, EN54-24 certified	255 x 194,5 x 87 mm	IP21	126 - 12.300 Hz (single) 139 - 12.200 Hz (double)	93 - 15.400 Hz (single) 106 - 15.400 Hz (double)	single h/v 160° double h/v 160°/150°	single h/v 160°/150° double h/v 100°/75°	single h/v 120°/60° double h/v 40°/35°	single h/v 180°/ 175° double h/v 180°/175°	1.57 kg	20142913