

WA 06-77/T-EN54

Wall speaker for Voice Alarm, 6W power, certified EN 54-24



Technical Data

Colour	RAL 9016
Dimensions	133x133x72 mm
Dispersion -6dB, 500Hz	h / v = 360°
Dispersion -6dB, 1KHz	h / v = 210°
Dispersion -6dB, 2KHz	h / v = 130°
Dispersion -6dB, 4KHz	h / v = 110°
Sensitivity EN54-24, 1W/4m	72,9 dB
Frequency Range	125 - 21.000 Hz
Frequency Response	112 - 24.000 Hz
SPL IEC268-5, 1W/1m	84,9 dB
SPL EN54-24, Pmax/4m	80,5 dB
Power	6/3/1,5 W




WA 06-77/T-EN54

Mounting Instruction

1. Mount the mounting plate/enclosure rear panel on the wall or ceiling using the screws suitable for the surface.
2. Insert the loudspeaker cable through the cable entry of the mounting plate/rear wall of the housing.
3. Connect the speaker cable to the 100V and COM terminals. If necessary, select a different power tapping.
4. Place the baffle on the mounting plate/rear panel of the enclosure and secure it with the enclosed screws.

Please note: To avoid damage, we recommend loosening the cable lug with a flat-blade screwdriver when changing the cable to a different power tapping.

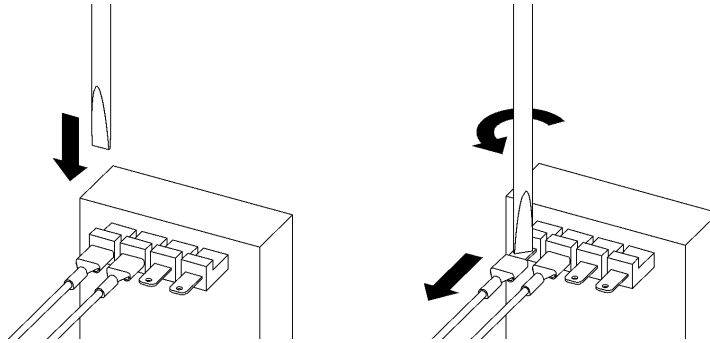

19

CE-Symbol according to 93/68EWG
Measurements according to DIN IEC 268-5
RoHS compliant (2011/65/EU)
CPR compliance according 305/2011/EU

Loudspeaker for voice alarm systems for fire
detection and fire alarm systems for buildings
ic audio GmbH, Boehringerstraße 14A
D-68307 Mannheim, Germany

EN54-24:2008
Ref. Nr.:007-19
ID-Code:SAA-LS07
1438-CPR-0683

TO MAKE PEOPLE LISTEN