



PRO 150-200/T plus black-EN54

- Outdoor application
- Strong beam type sound
- IP 66



EN 54-24:2008
Ref. Nr.: 021-09
ID-Code: SAA-LS26
 1438-CPR-0814

ic audio GmbH, Boehringerstraße 14a,
 68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The PRO 150-200/T plus black-EN54 is a weather-resistant 2-way coaxial horn loudspeaker, engineered for demanding outdoor applications with superb music quality and EN54 certification. It delivers a smooth yet powerful beam-type sound for professional sound reinforcement in airports, mega-stores, stadiums, and other large-scale installation areas.

The 150-watt loudspeaker is equipped with a high-performance 2-way bass-reflex system, consisting of an 8" woofer and a high-performance HF driver with a crossover at 2.5 kHz. Three different 100V power taps as well as low-impedance operation provide excellent flexibility for a wide range of sound system designs.

The robust, impact-resistant ABS housing with its high IP66 protection rating is designed for reliable performance in demanding environmental conditions. For long-term outdoor use, the loudspeaker features an aluminium front grille. Both the front grille and the mounting bracket are finished with an outdoor polyester powder coating, making them ideally suited for changing weather conditions.

The speaker is connected via a screw terminal on the rear, protected by a cover plate with 2 × PG11 cable glands. The tilt-adjustable mounting bracket made of stainless steel (AISI 304) allows for easy, secure, and flexible installation. A safety cable is included.

Product	PRO150-200/T plus black-EN54
Artikel Nr.	20217063

Acoustics

Power	150/75/38W (8ohm)
Impedance (100V)	67/133/263 ohm
Speaker ø	200 mm
Frequency Range	90 - 19.000 Hz
Frequency Response	75 - 20.000 Hz
SPL 1W/1m, peak	104 dB
SPL 1W/4m, peak	92 dB
SPL Pmax/4m, peak	113 dB
SPL IEC268-5, 1W/1m	98,0 dB
SPL IEC268-5, Pmax/1m	116,8 dB
Sensitivity EN54-24, 1W/4m	84,7 dB
Dispersion -6dB, 500Hz	170° (h) 180° (v)
Dispersion -6dB, 1KHz	79° (h) 80° (v)
Dispersion -6dB, 2KHz	50° (h) 62° (v)
Dispersion -6dB, 4KHz	85° (h) 70° (v)

Connections and Housing

Connector	4-pin screw terminal
Terminal Diameter	2,5 mm
Maximum Cable Passage	4,9 mm ²
Max. cable cross section loop	2x1,2mm ²
Temperature Range	-25 / +70 °C
Type A/B	B
Dimensions	315x305x350 mm
Weight (net)	11,85 kg
Housing	ABS
Colour	RAL 9005
Mounting	Mounting bracket
IP Rating	IP66

Certification

Ref. Nr.	021-09
ID-Code	SAA-LS26
Certificate Number	1438-CPR-0814


Product Attributes



Technical Drawing

ic audio


PRO 150-200/T plus-EN54

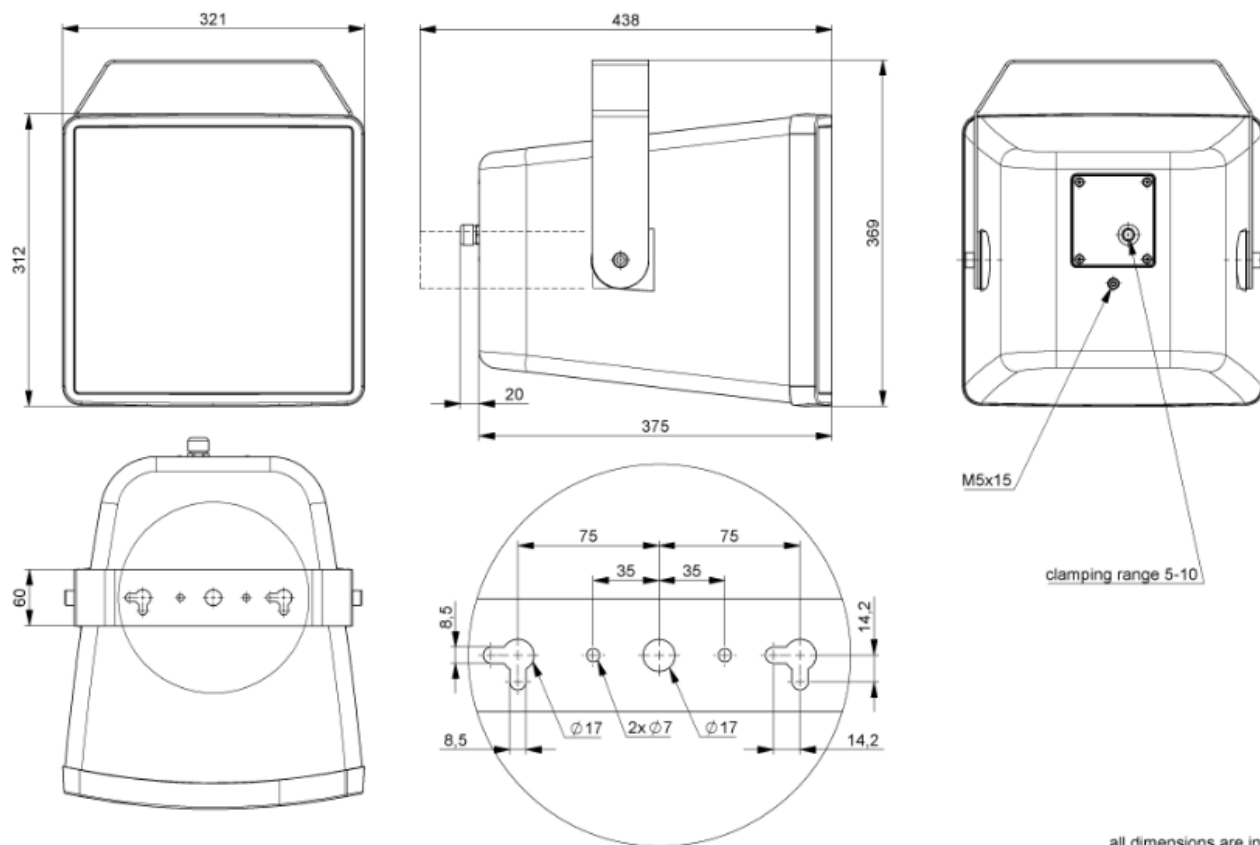


all dimensions are in mm

Frequency Response Diagram

Sensitivity

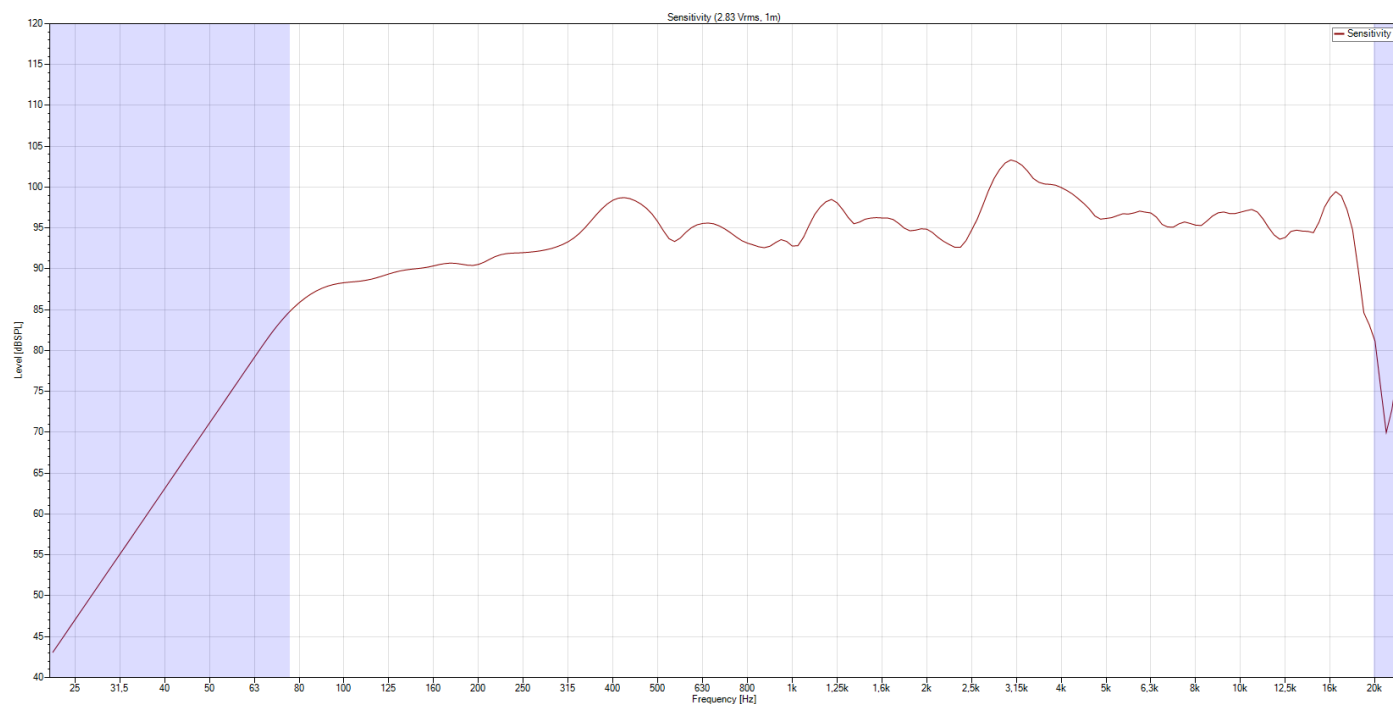


SPL Max

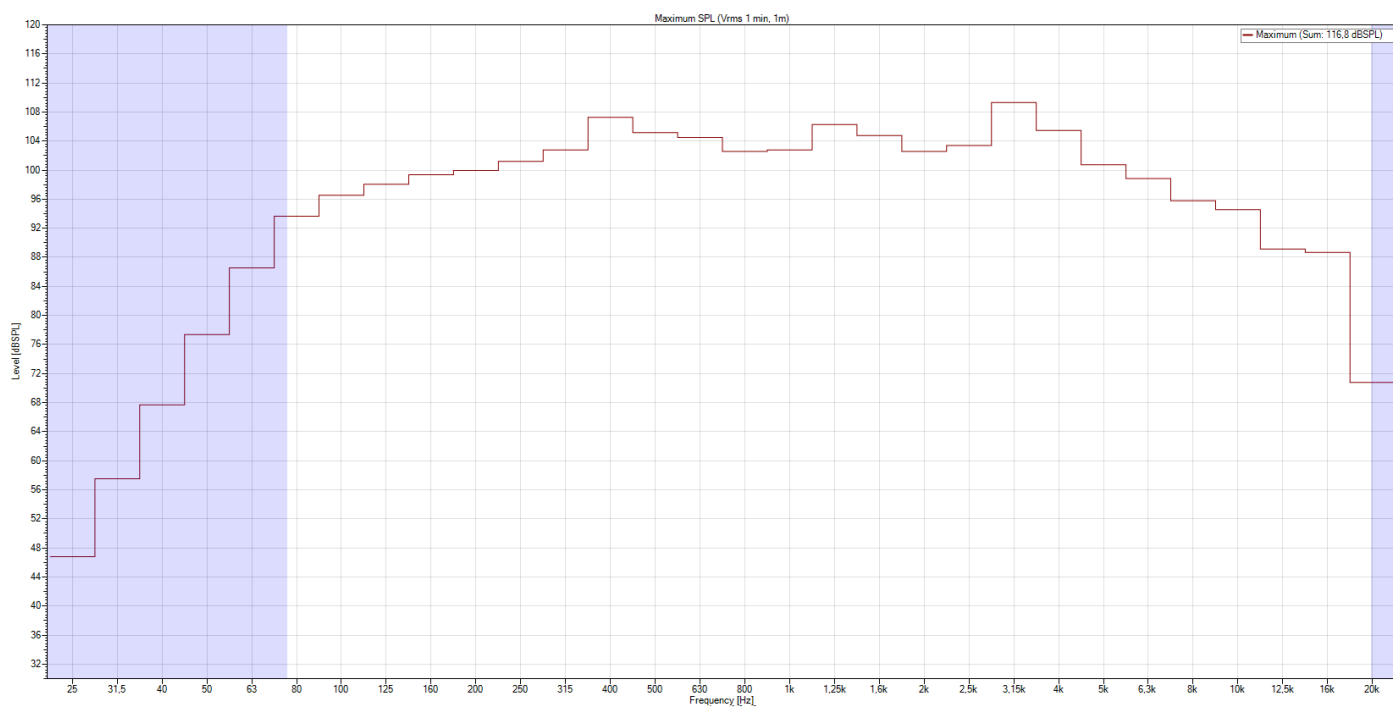


Isobar

Horizontal

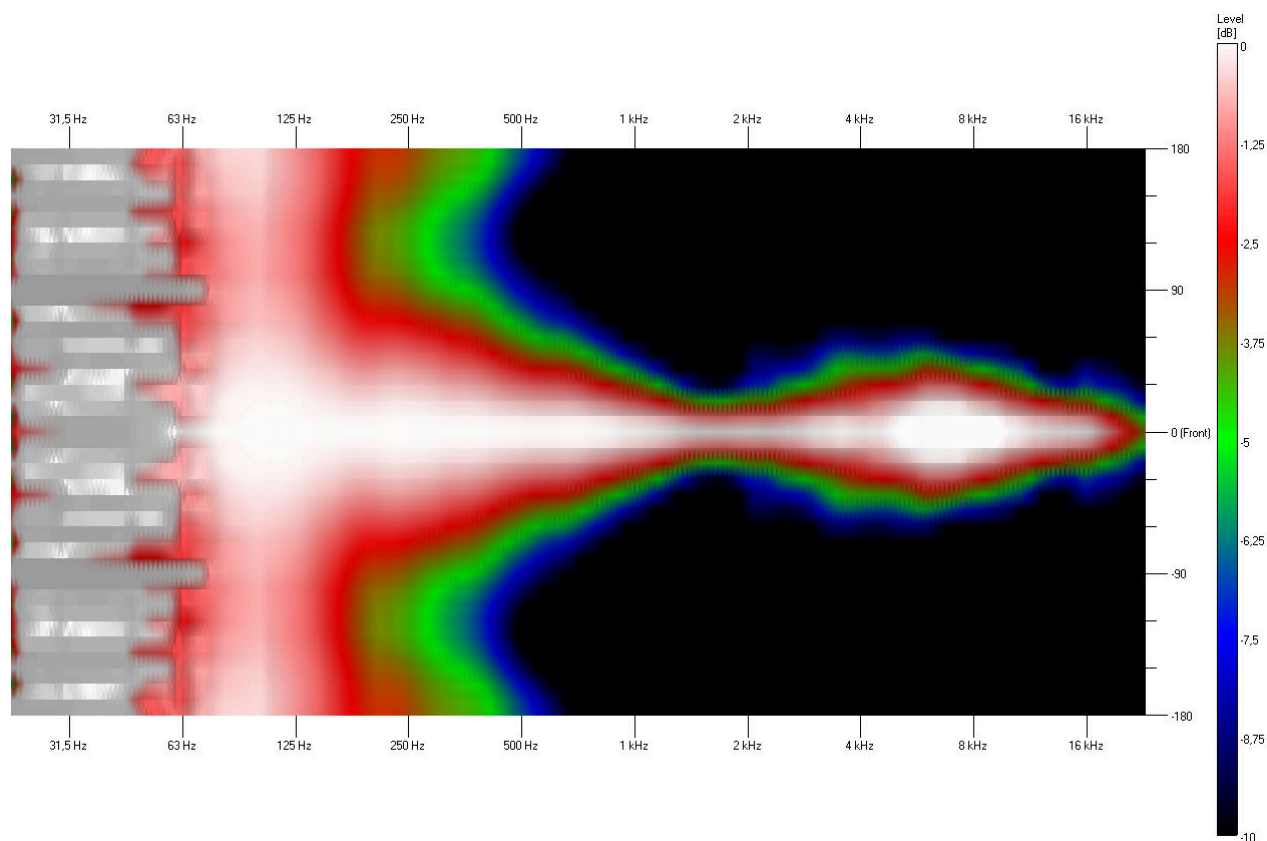


Vertical

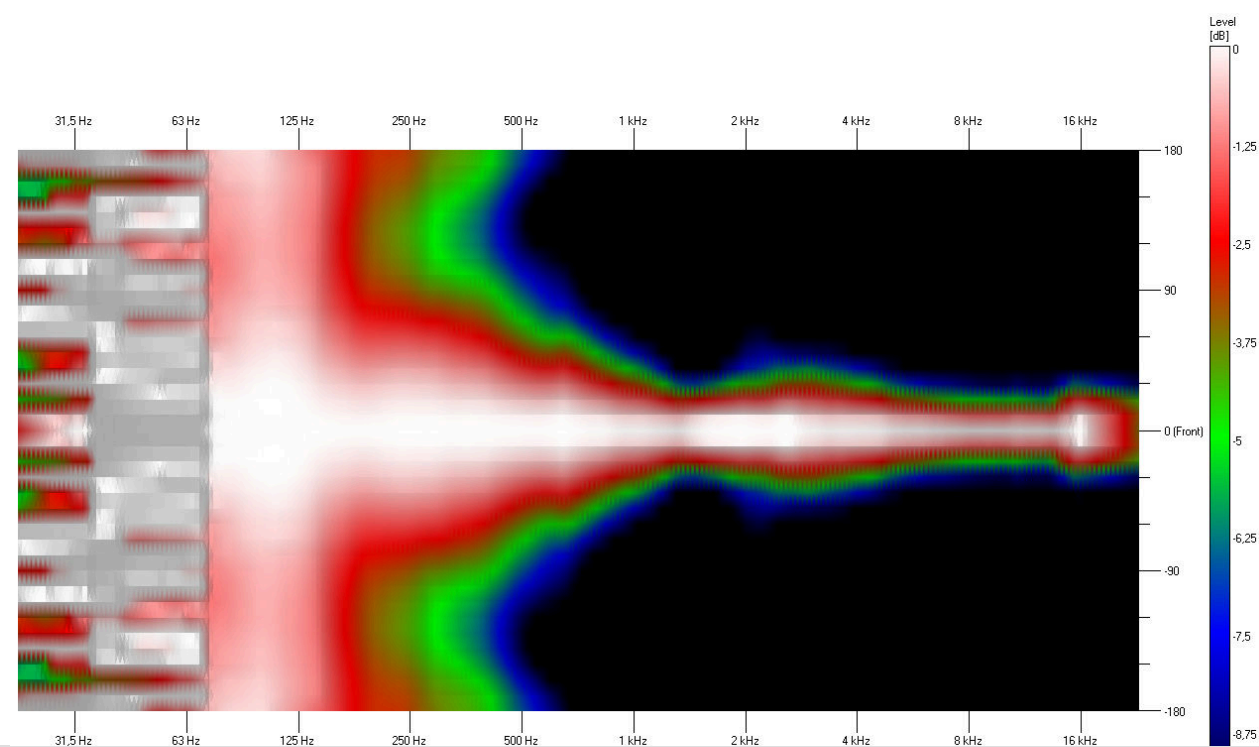


Polar Diagram


Polar Diagram 500Hz

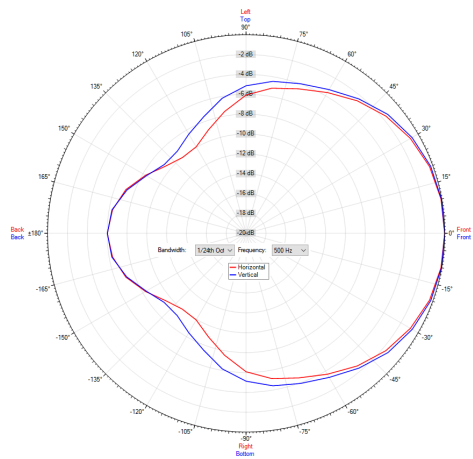


Polar Diagram 4000Hz

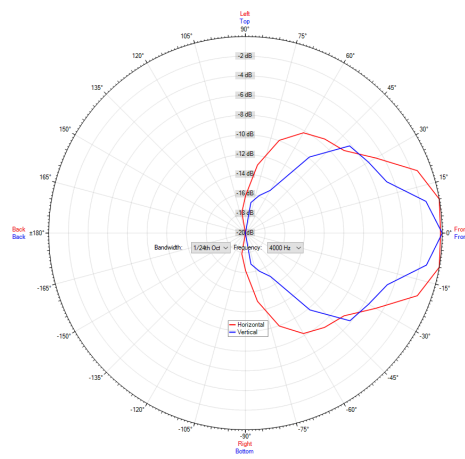


Polar Diagram 1000Hz

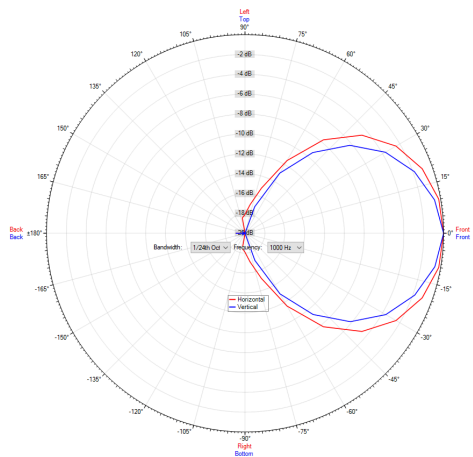

Polar Diagram 8000Hz

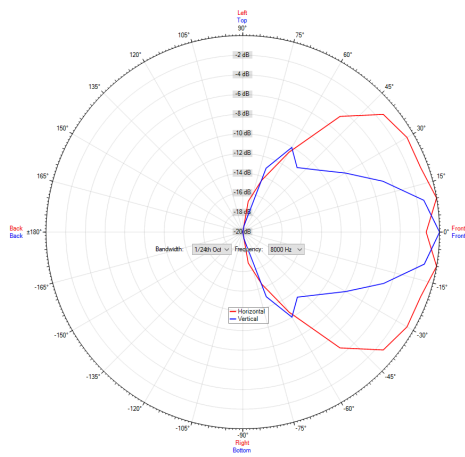

Polar Diagram 2000Hz

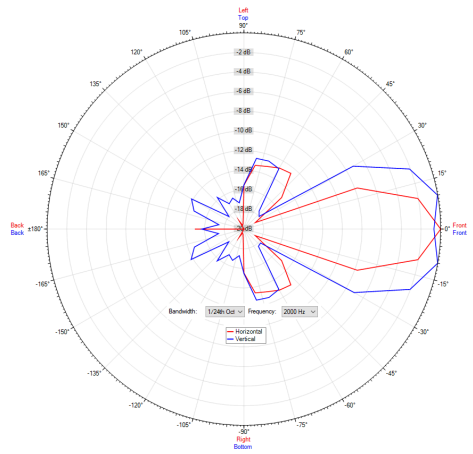

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Artikel Nr. : 20217063
Packing Unit: 1

