



DL-H 20-100/T plus black-EN54

- UV-resistant
- easy power adjustment
- 2-Way system

EN54

CE
25

EN 54-24:2008
Ref. Nr.: 060-26
ID-Code: SAA-LS70
1438-CPR-0766

ic audio GmbH, Boehringerstraße 14a,
68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The 20W speaker is equipped with a 100mm 2-way bass reflex system and offers powerful sound with a wide and homogeneous dispersion. The DL-H has a 100V transformer with 4 power adjustments, these can be easily adjusted by a rotary switch on the top of the sphere. Low-impedance operation is also possible.

The impact-resistant, UV-resistant ABS plastic housing in RAL 9005 guarantees lasting stability. Additional operational safety is provided by the 2-pin ceramic terminal block, a thermal fuse, a PG screw connection integrated into the canopy and the moisture impregnation of the loudspeaker. The loudspeaker is protected against the risks of environmental influences with protection class IP65.

The connection is made via a 2-core, 4.5m long cable. Quick and uncomplicated installation using mounting hooks and canopy.

The speaker is compliant with the British Standard BS 5839, Part 8.

Product	DL-H 20-100/T plus black-EN54
Article No	20238240

Acoustics

Power	20 / 10 / 5 / 2.5 (8)W
Impedance (100V)	500 / 1000 / 2000 / 4000 / 8 ohm
Speaker ø	100 mm
Frequency Range	80 -20.000 Hz
Frequency Response	70 - 22.000 Hz
SPL 1W/1m, peak	89,0 dB
SPL 1W/4m, peak	77,0 dB
SPL Pmax/4m, peak	90,0 dB
SPL IEC268-5, 1W/1m	92,0 dB
SPL IEC268-5, Pmax/1m	96,0 dB
Sensitivity EN54-24, 1W/4m	71,9 dB
Dispersion -6dB, 500Hz	360° h/v
Dispersion -6dB, 1KHz	160° h/v
Dispersion -6dB, 2KHz	102° h/v
Dispersion -6dB, 4KHz	86° h/v

Connections and Housing

Connector	2-pin ceramic block
Terminal Diameter	3,2 mm
Maximum Cable Passage	8 mm²
Max. cable cross section loop	2x2 mm²
Temperature Range	-10 / +55 C°
Type A/B	A
Dimensions	190x231 mm
Weight (net)	2,31 kg
Housing	ABS
Colour	RAL 9005
Mounting	Mounting hook
IP Rating	IP65

Certification

Ref. Nr.	060-26
ID-Code	SAA-LS70
Certificate Number	1438-CPR-0766

Product Attributes



Technical Drawing

ic audio

DL-H 20-100/T plus-EN54

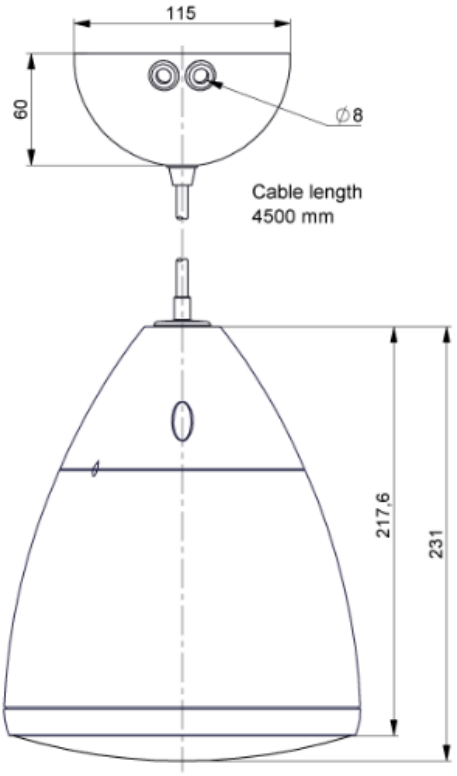

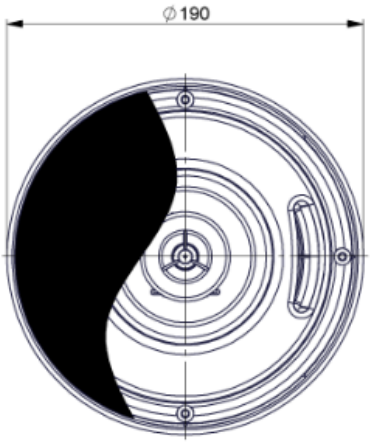

all dimensions are in mm

Frequency Response Diagram

Sensitivity

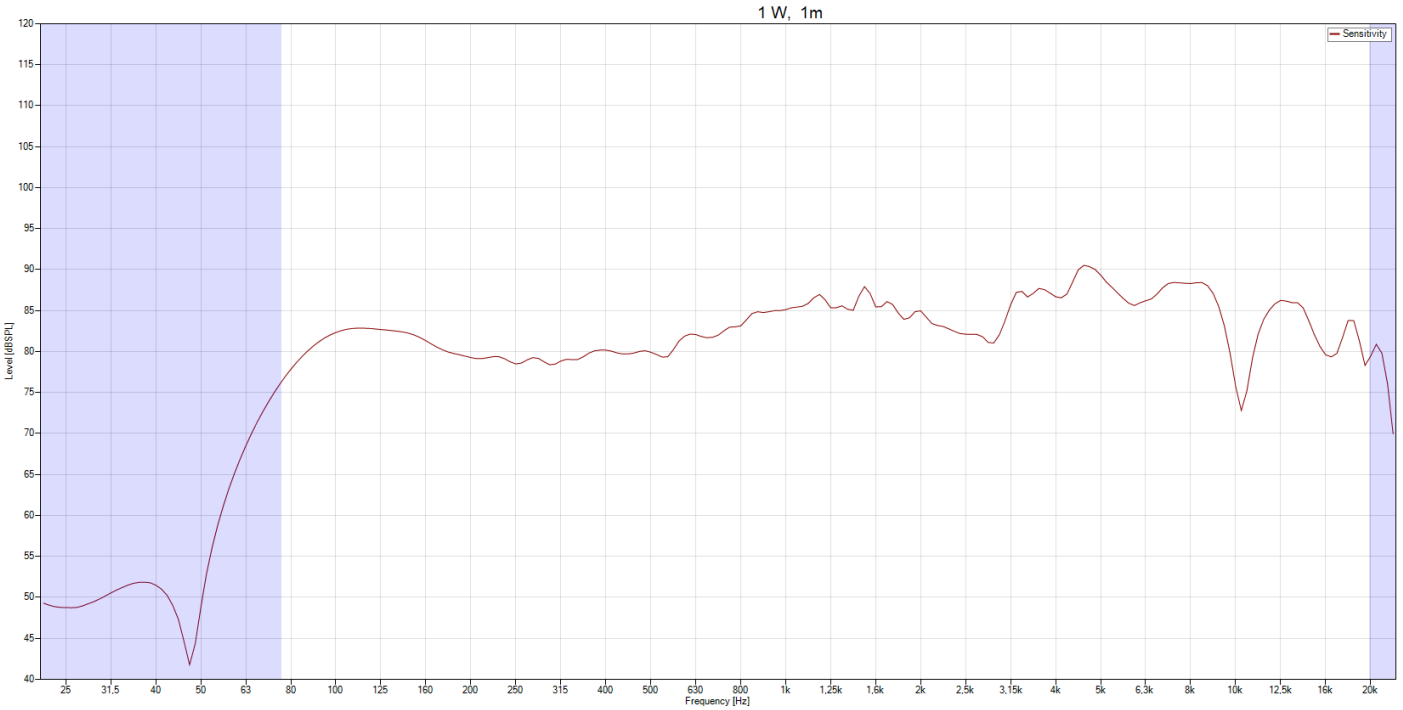

SPL Max

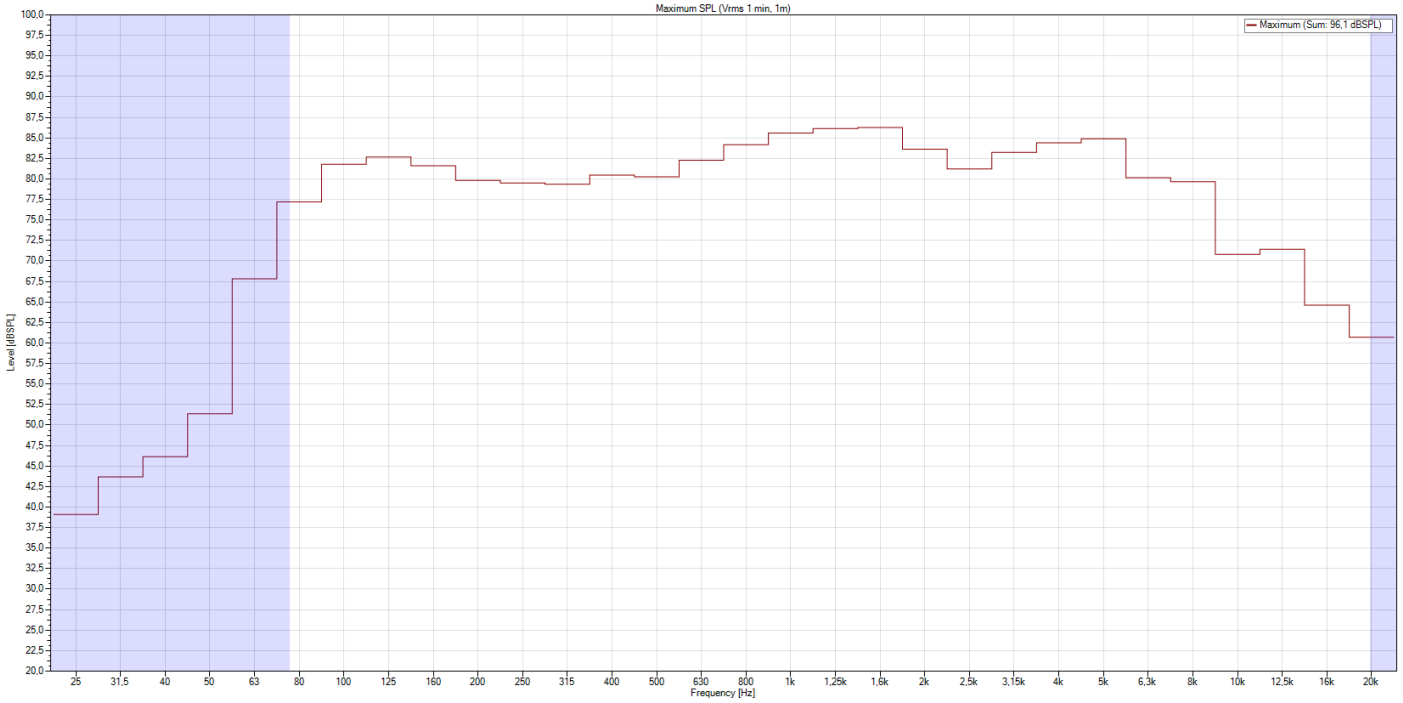

Isobar

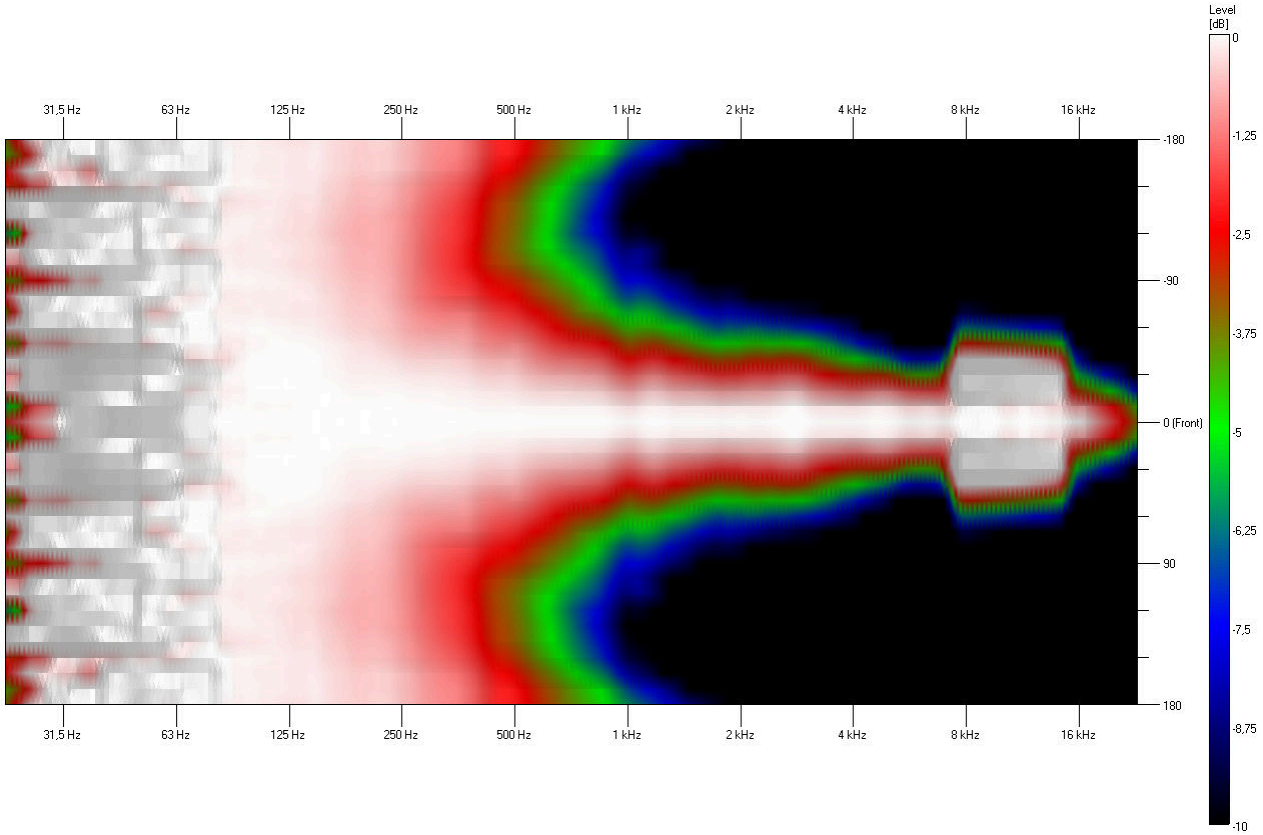
Level
[dB]
0
-1,25
-2,5
-3,75
-5
-6,25
-7,5
-8,75
-10
31,5 Hz
63 Hz
125 Hz
250 Hz
500 Hz
1 kHz
2 kHz
4 kHz
8 kHz
16 kHz
-180
-90
0 (Front)
90
180

Polar Diagram

Polar Diagram 500Hz

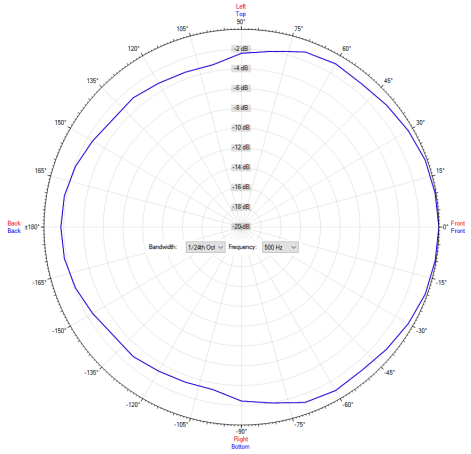

Polar Diagram 4000Hz

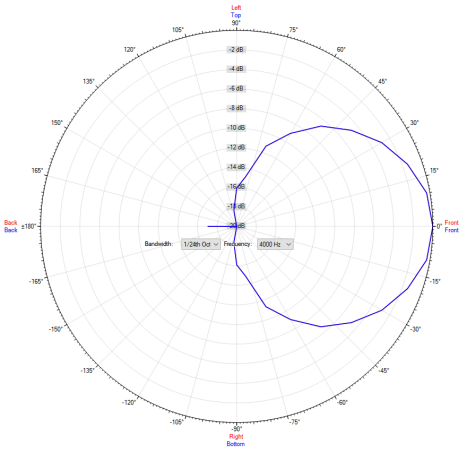

Polar Diagram 1000Hz

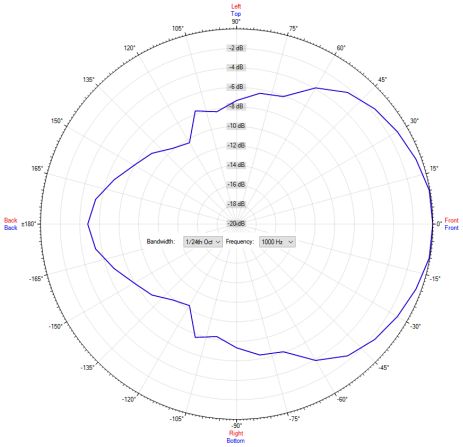

Polar Diagram 8000Hz

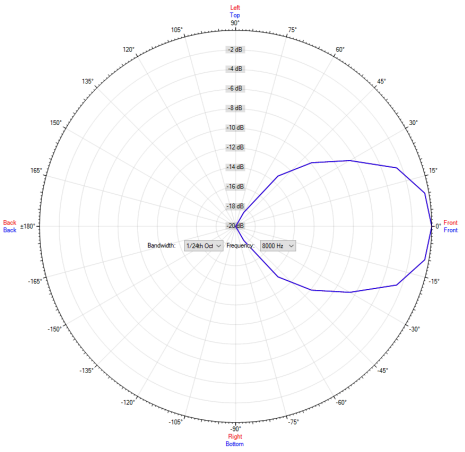

Polar Diagram 2000Hz

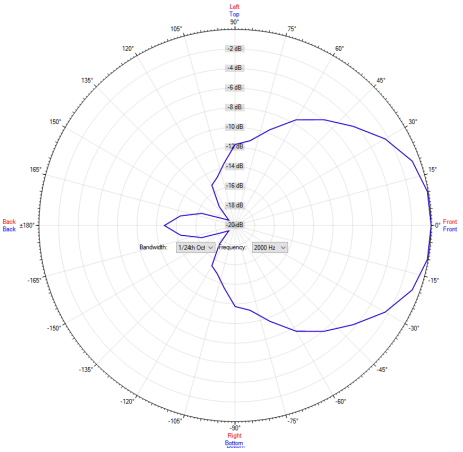

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.

Article No: 20238240
Packing Unit: 4