WU 06-165/T-EN54

Flush-mounted wall speaker for Voice Alarm, 6W power, certified EN 54-24



Mechanical Data

Colour	RAL 9010
Dimensions	255x195x88 mm
Weight (net)	1,40 kg
Power	6/3/1,5 W
Connector	2-pin ceramic block
Terminal Diameter	3,2 mm
Maximum Cable Passage	8 mm²
Mounting	Flush mounting

TO MAKE PEOPLE LISTEN


Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-08

WU 06-165/T-EN54

Mounting Instruction

1. Guide the speaker cable into the installation housing.
2. Place the installation housing in the wall.
3. Connect the speaker cable to the transformer.
4. Insert the loudspeaker into the installation housing. Secure the speaker with the enclosed screws.
5. Place the grille on the speaker.

Please note: To avoid damage, we recommend loosening the cable lug with a flat-blade screwdriver when changing the cable to a different power tapping.

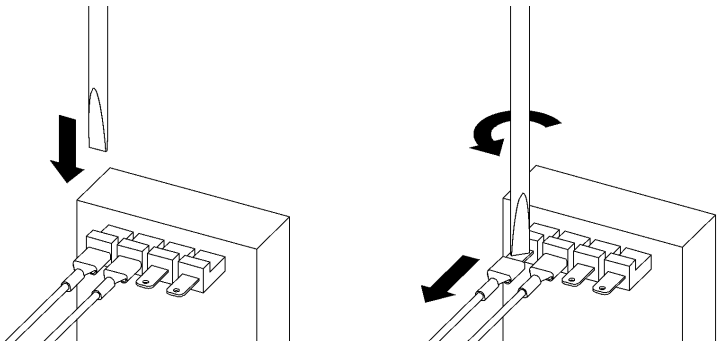

CE
15

CE-Symbol according to 93/68EWG
Measurements according to DIN IEC 268-5
RoHS compliant (2011/65/EU)
CPR compliance according 305/2011/EU

Loudspeaker for voice alarm systems for fire detection and fire alarm systems for buildings
ic audio GmbH, Boehringerstraße 14A
68307 Mannheim, Germany

EN54-24:2008
Ref. Nr.:018-15
ID-Code:SAA-LS09
1438-CPR-0270

TO MAKE PEOPLE LISTEN

Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-08