# WU-AB 06-100/T-EN54

Flush-mounted wall speaker for Voice Alarm, 2 x 6W power, certified EN 54-24



## Mechanical Data

| | |
|---|---|
| Colour | RAL 9010 |
| Dimensions | 255x195x88 mm |
| Weight (net) | 1,57 kg |
| Power | 2x6/3/1,5 W |
| Connector | 2-pin ceramic block |
| Mounting | Screws |

TO MAKE PEOPLE LISTEN

Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-08


# WU-AB 06-100/T-EN54

4 260590 180575

## Mounting Instruction

1. Guide the connection cables into the installation housing.
2. Place the installation housing in the wall recess.
3. Connect the cables to the transformer.
4. Insert the loudspeaker into the installation housing. Secure it with the enclosed screws.
5. Place the grille on the speaker. Secure the grille with the enclosed screws.

**Please note**: To avoid damage, we recommend loosening the cable lug with a flat-blade screwdriver when changing the cable to a different power tapping.

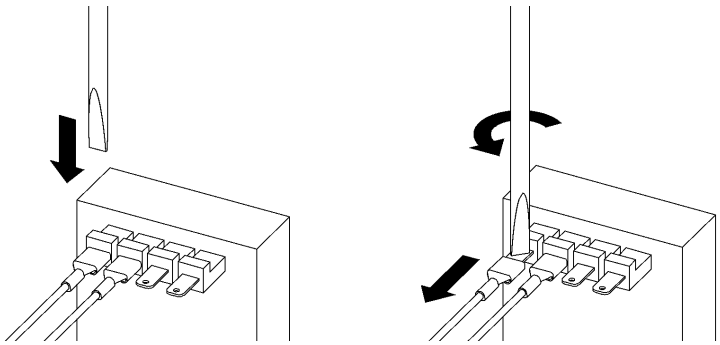

CE
15

CE-Symbol according to 93/68EWG
Measurements according to DIN IEC 268-5
RoHS compliant (2011/65/EU)
CPR compliance according 305/2011/EU

Loudspeaker for voice alarm systems for fire detection and fire alarm systems for buildings
ic audio GmbH, Boehringerstraße 14A
68307 Mannheim, Germany

EN54-24:2008
Ref. Nr.:009-15
ID-Code:SAA-LS09
1438-CPR-0270

TO MAKE PEOPLE LISTEN

Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-08