
WA 06-77/T CLR

Wall speaker for cleanroom application, 6W power



Technical Data

Colour	RAL 9016
Dimensions	133x133x72 mm
Frequency Range	715 - 22.000 Hz
Frequency Response	300 - 24.000 Hz
Power	6/3/1,5 W

TO MAKE PEOPLE LISTEN

Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-06

WA 06-77/T CLR

4 260590 186256

Mounting Instruction

1. Attach the counterpart of the bayonet mount to the desired surface using the supplied or other suitable fastening material.
   Note: Attach the counterpart horizontally or vertically, depending on the desired orientation of the speaker. Refer to the drawing for the correct orientation.
2. Press the speaker onto the counterpart of the bayonet mount.
3. Turn the speaker in the desired direction while applying slight pressure.
4. Connect the speaker via the cable junction box.

Note: Please take care not to damage the speaker membrane during installation.

CE
25


CE-Symbol according to 93/68EWG
Measurements according to DIN IEC 268-5
RoHS compliant (2011/65/EU)

ic audio GmbH, Boehringerstraße 14A
68307 Mannheim, Germany

TO MAKE PEOPLE LISTEN

Copyright ©2026 ic audio GmbH. All rights reserved. Date: 2026-10-06

WA 06-77T CLR

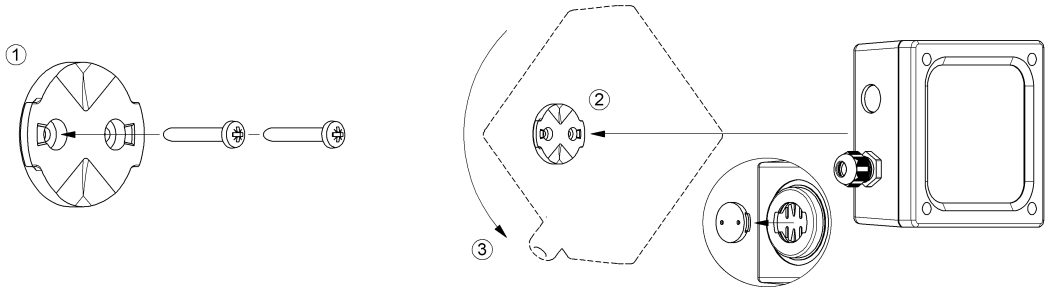

WA 06-77T CLR

