



DL-A 10-165/T-EN54 SKD-W
Surface-mounted ceiling speaker for Voice Alarm,
power 10W, certified EN 54-24

Technical Data

Colour	RAL 9010
Dimensions	170x75 mm
Dispersion -6dB, 500Hz	h/v 360°
Dispersion -6dB, 1KHz	h/v 210°
Dispersion -6dB, 2KHz	h/v 95°
Dispersion -6dB, 4KHz	h/v 50°
Sensitivity EN54-24, 1W/1m	93,0 dB
Sensitivity EN54-24, 1W/4m	81,0 dB
Frequency Range	290 - 23.400 Hz
Frequency Response	230 - 24.000 Hz
SPL IEC268-5, 1W/1m	93,0 dB
SPL EN54-24, Pmax/4m	89,0 dB
Power	10/6/3/1,5 W


DL-A 10-165/T-EN54 SKD-W



Mounting Instruction

1. Mount the mounting plate on the wall or ceiling with the appropriate screws for the surface.
2. Insert the speaker cable through the cable entry of the mounting plate.
3. Connect the loudspeaker cable to the 100V and COM terminals.
If necessary, select a different power tapping.
4. Place the baffle on the mounting plate and fix it with the enclosed screws.

Please note: To avoid damage, we recommend loosening the cable lug with a flat-blade screwdriver when changing the cable to a different power tapping.

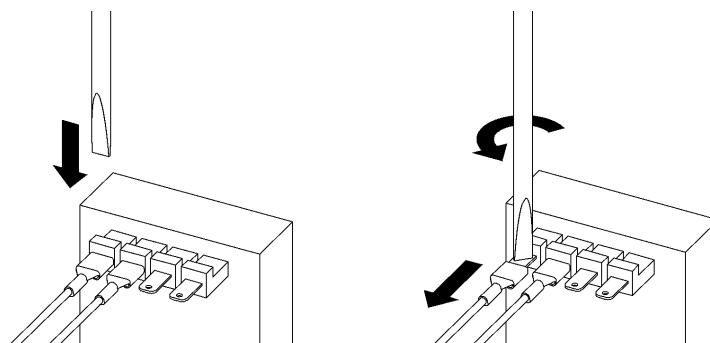

11

CE-Symbol according to 93/68EWG
Measurements according to DIN IEC 268-5
RoHS compliant (2011/65/EU)
CPR compliance according 305/2011/EU

Loudspeaker for voice alarm systems for fire
detection and fire alarm systems for buildings
ic audio GmbH, Boehringerstraße 14A
68307 Mannheim, Germany

EN54-24:2008
Ref. Nr.:004-13
ID-Code:SAA-
LS04
1438-CPR-0232

TO MAKE PEOPLE LISTEN