



MS active 165 black

- 2-band equalizer
- RCA and stereo jack input
- 2 x 40W power



EN 54-24:2008
Ref. Nr.: 1
ID-Code: 1

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG



The compact monitor speaker impresses with its unique design and excellently tuned speaker components. Thanks to modern 2-way technology, particularly suitable for installations with demanding sound quality. The speaker is equipped with a high-quality 2-way system. The impact-resistant, UV-resistant ABS plastic housing (UL 94-V0) in black guarantees lasting stability. A convenient connection of the loudspeaker is made possible by cinch sockets. In addition, you have the option of connecting other stereo sources such as an MP3 player or your PC to the loudspeaker via a 3.5 mm jack plug.

Cost-effective stereo operation through connecting a passive loudspeaker via a Euroblock connector. The active monitor speaker with 2x40W power amplifier is operated according to protection class 2 for electrical equipment (without protective earth) and thus prevents interference signals such as hum loops. A 2-band equaliser on the back of the speaker allows fine-tuning of bass and treble.

Quick and uncomplicated mounting with the included swivel joint.

Technical Data (Electrical)

On request, this loudspeaker can be supplied as a special production with an automatic NF switch-on.

Power	2x40 W (Stereo)
Frequency Range	69 - 20.100 Hz
Frequency Response	60 - 24.000 Hz


Technical Data (Mechanical)

Dimensions	325x202x192 mm
Weight (net)	5,40 kg
Temperature range	-20 / +80 °C
Mounting	Swivel bracket
Connector	RCA-sockets
Colour	black


Product Attributes





Technical Diagrams

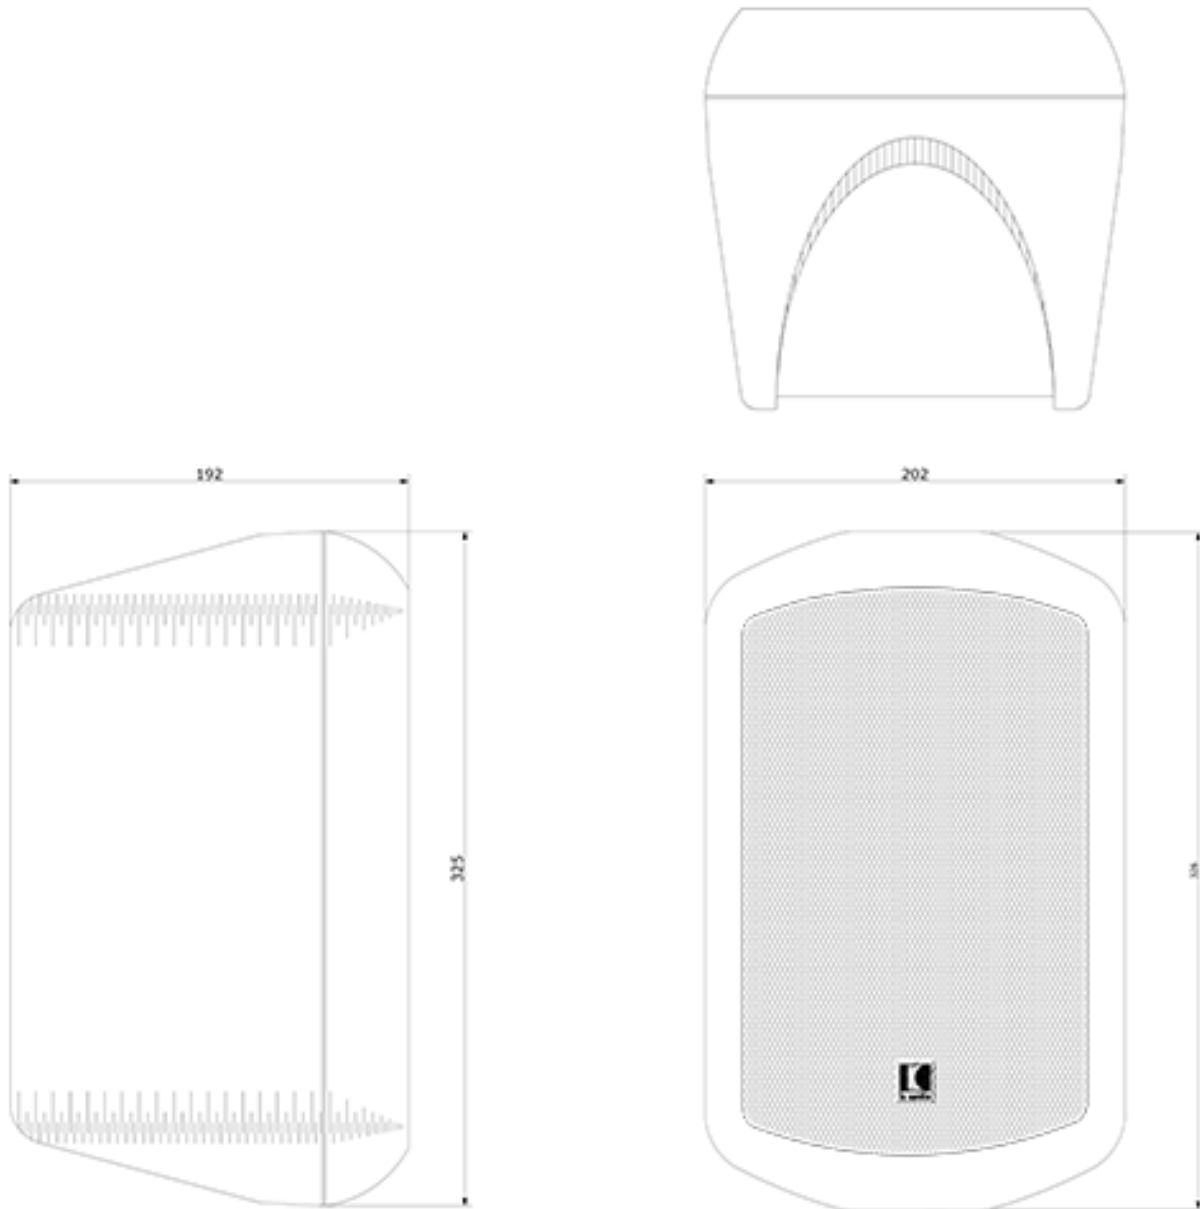

Frequency Response Diagrams

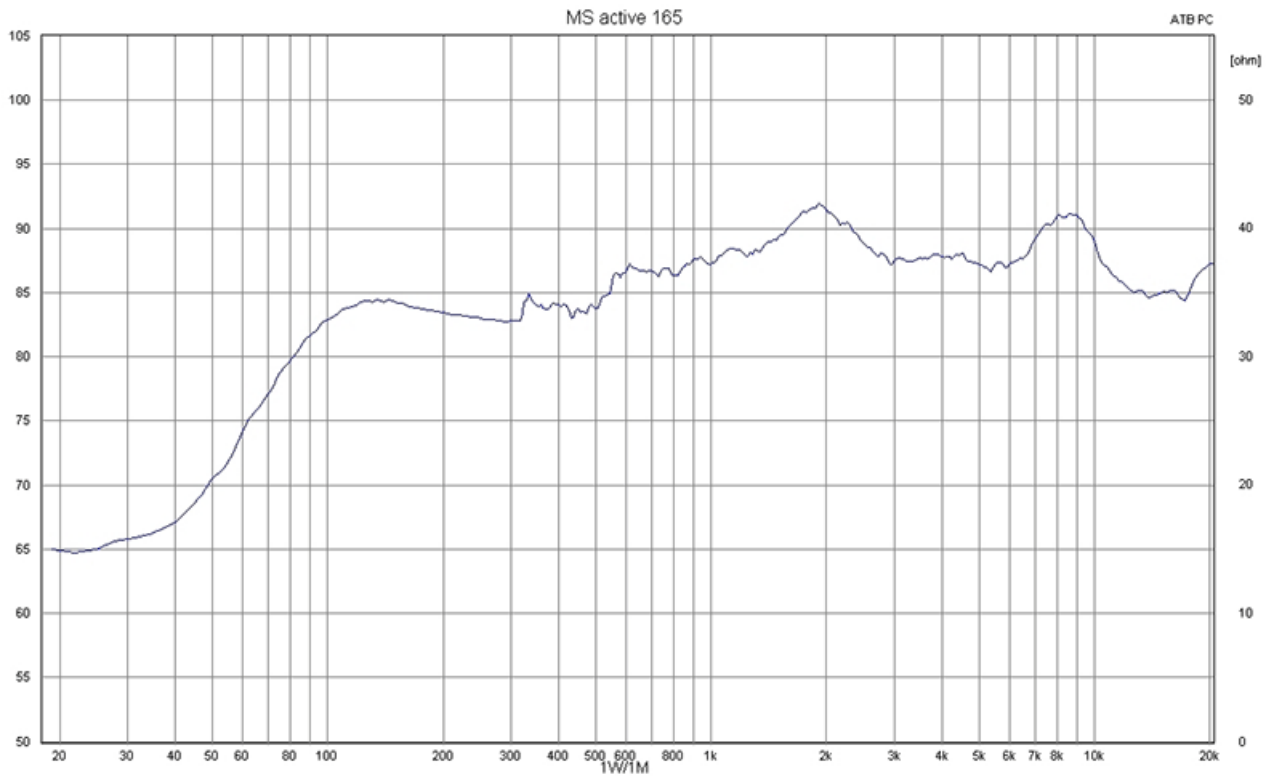

Polar Diagrams

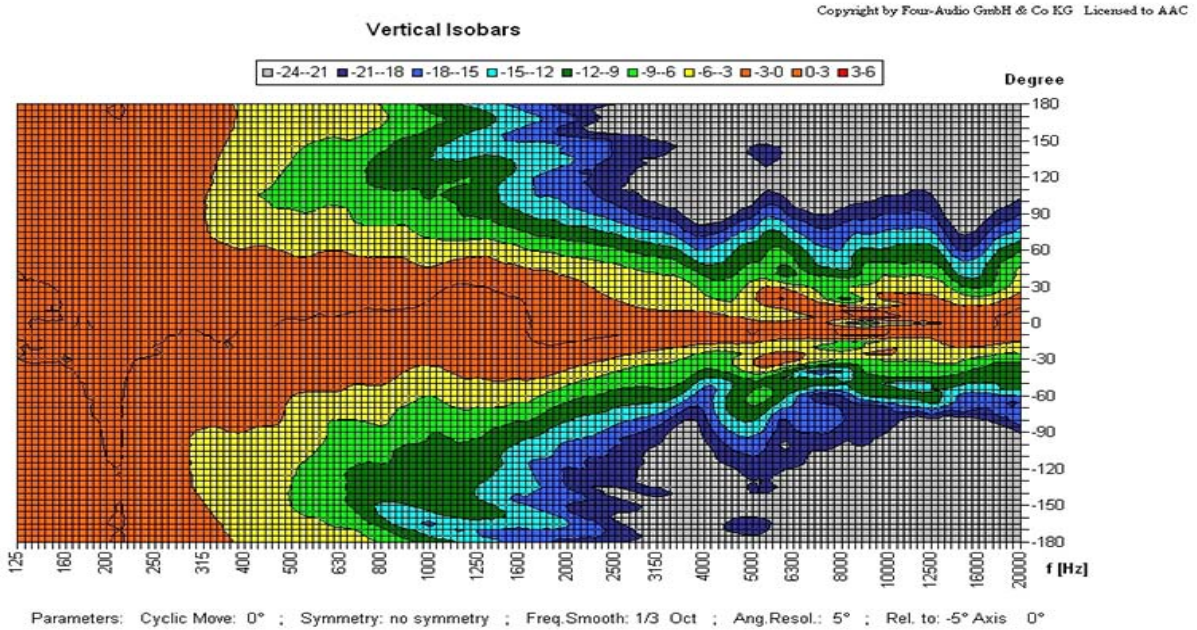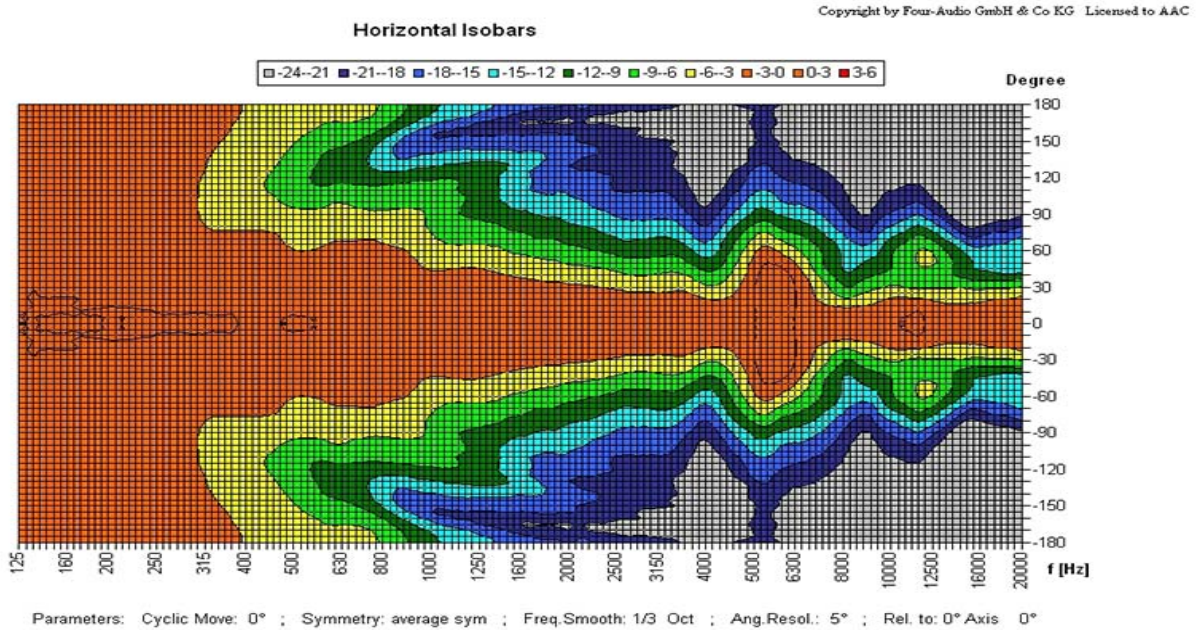

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Article Nr.: 20101846

Packing Unit: 4

